

Submittal Data: TVRF-IE4WC30KPH 30,000 BTU/h 4 Way Cassette Evaporator

Job Name _____ Location _____ Date _____

Purchaser _____ Engineer _____

Submitted To _____ For Reference Approval Construction

Unit Designation _____ Schedule No. _____

GENERAL FEATURES

- Strong and Balanced Airflow
- DC inverter motor
- Intelligent drainage device
- Ultra quiet operation



Performance

Cooling	
Rated Capacity	30,000 BTU/h 8.8 kW
Heating	
Rated Capacity	34,000 BTU/h 10 kW

Unit Data

Fan	
Type x Qty	Centrifugal x 1
Output Power	75 W
FLA	
Airflow	
High / Medium / Low	885/800/650 CFM 1500/1350/1100 m ³ /h
Sound Pressure Level	
High / Medium / Low	40/38/35 dB(A)
Dimensions & Weights	
Unit Dimensions (WxHxD)	33.07×33.07×12.60-in 840×840×320 mm
Weight (Net/Shipping)	71.7/88.2 LBS 32.5/40 kg


Electrical & Power Supply

Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz
MCA	0.44 A
MOCP/Breaker Size	6 A


Refrigerant and Piping

Refrigerant Type	R410A
Gas Pipe Size (OD)	5/8-in
Liquid Pipe Size (OD)	3/8-in
Drain Pipe Size (OD)	1-in
Connection Method	Flared

DIMENSIONAL SPECIFICATIONS

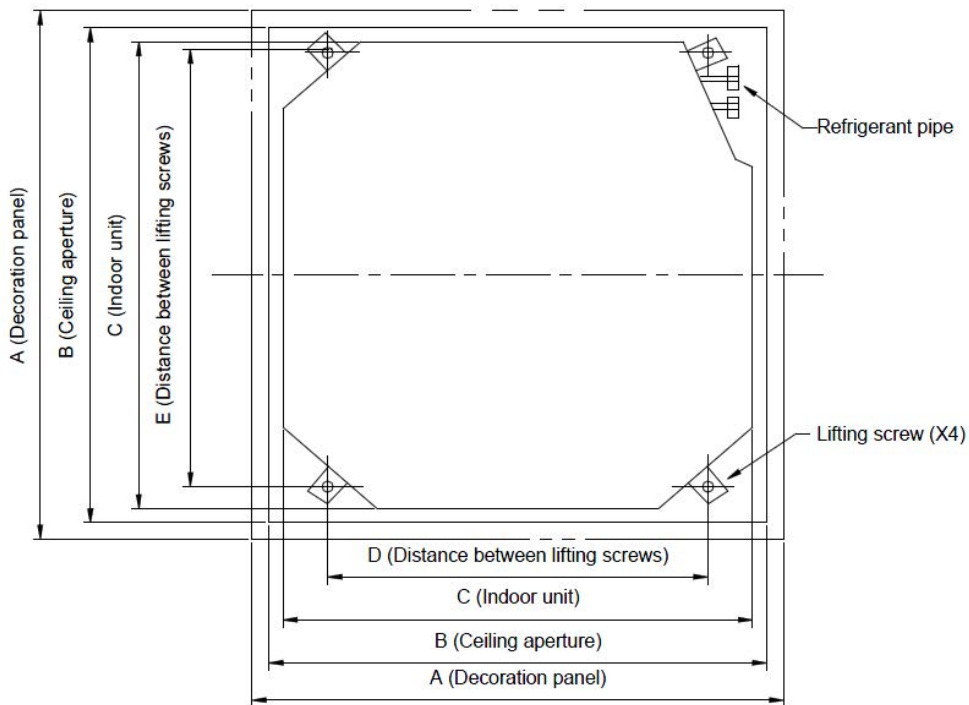

	A	B	C	D	E	G	H
mm	950	890	840	680	780	65	340
inch	37-3/8	35-1/16	33-1/16	26-3/4	30-11/16	2-1/2	13-3/8

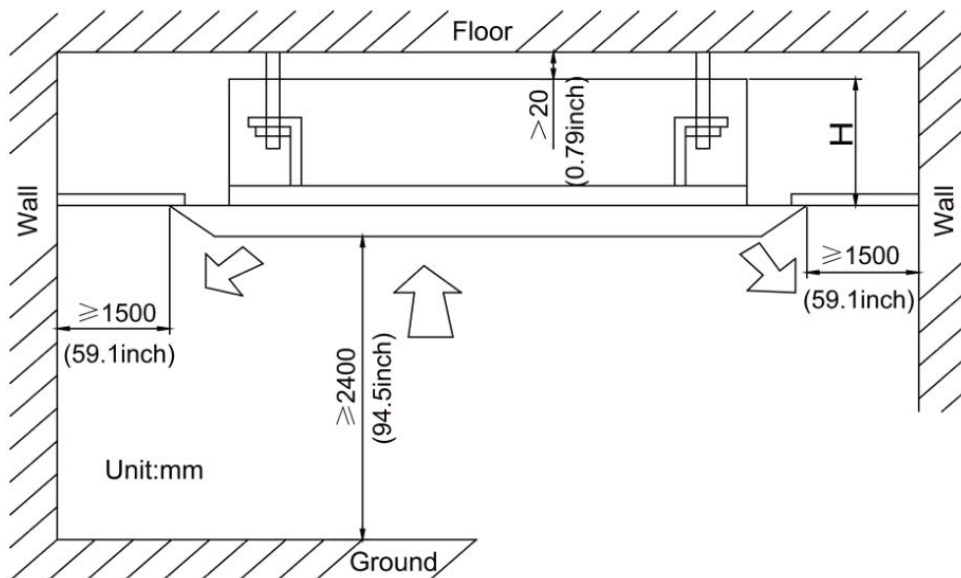

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.