

Submittal Data: TVRF-IE4WC36KPH 36,000 BTU/h 4 Way Cassette Evaporator

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Unit Designation	Schedule No.	

GENERAL FEATURES

- Strong and Balanced Airflow
- DC inverter motor
- Intelligent drainage device
- Ultra quiet operation



Performance

Cooling	
Rated Capacity	36,000 BTU/h 10.55 kW
Heating	
Rated Capacity	40,000 BTU/h 11.72 kW

Unit Data

Fan	
Type x Qty	Centrifugal x 1
Output Power	75 W
FLA	
Airflow	
High / Medium / Low	1000/825/650 CFM
	1700/1400/1100 m ³ /h
Sound Pressure Level	
High / Medium / Low	41/38/36 dB(A)
Dimensions & Weights	
Unit Dimensions (WxHxD)	33.07×33.07×12.60-in
	840×840×320 mm
Weight (Net/Shipping)	71.7/88.2 LBS
	32.5/40 kg


Electrical & Power Supply

Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz
MCA	0.44 A
MOCP/Breaker Size	6 A


Refrigerant and Piping

Refrigerant Type	R410A
Gas Pipe Size (OD)	5/8-in
Liquid Pipe Size (OD)	3/8-in
Drain Pipe Size (OD)	1-in
Connection Method	Flared

DIMENSIONAL SPECIFICATIONS

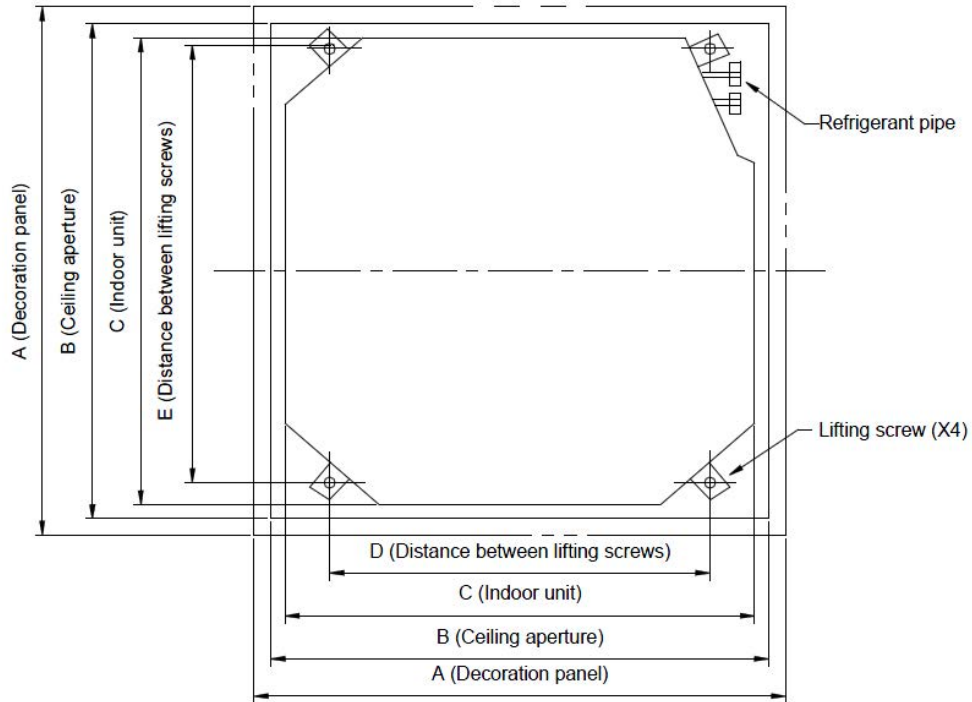

—	A	B	C	D	E	G	H
mm	950	890	840	680	780	65	340
inch	37-3/8	35-1/16	33-1/16	26-3/4	30-11/16	2-1/2	13-3/8

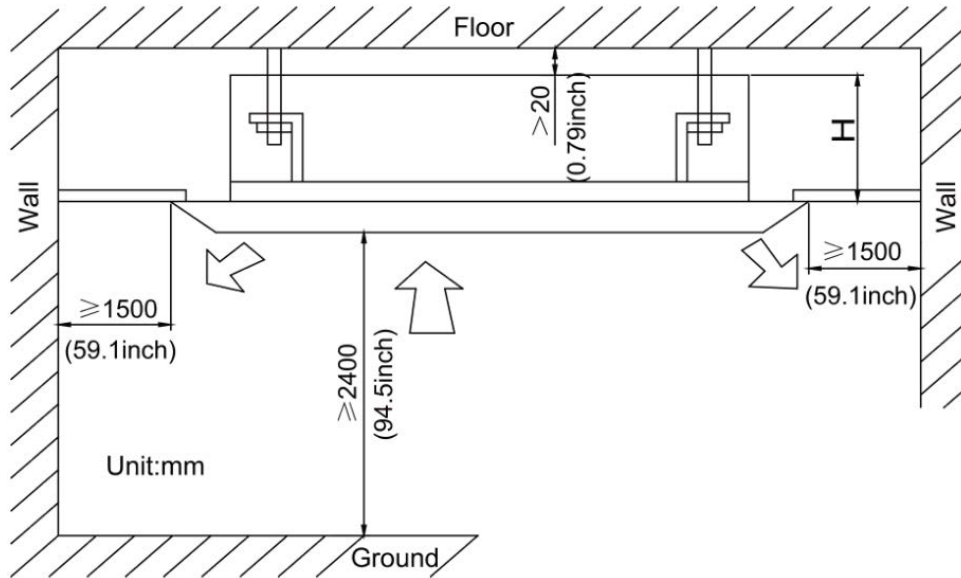

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.