

**Submittal Data: TVRF-IE4WC48KPH** 48,000 BTU/h 4 Way Cassette Evaporator

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Unit Designation	Schedule No.	

**GENERAL FEATURES**

- Strong and Balanced Airflow
- DC inverter motor
- Intelligent drainage device
- Ultra quiet operation



**Performance**

<b>Cooling</b>	
Rated Capacity	48,000 BTU/h 14.1 kW
<b>Heating</b>	
Rated Capacity	54,000 BTU/h 15.8 kW

**Unit Data**

<b>Fan</b>	
Type x Qty	Centrifugal x 1
Output Power	75 W
FLA	
<b>Airflow</b>	
High / Medium / Low	1095/885/680 CFM 1860/1500/1150 m <sup>3</sup> /h
<b>Sound Pressure Level</b>	
High / Medium / Low	43/41/38 dB(A)
<b>Dimensions &amp; Weights</b>	
Unit Dimensions (WxHxD)	33.07×33.07×12.60-in 840×840×320 mm
Weight (Net/Shipping)	71.7/88.2 LBS 32.5/40 kg


**Electrical & Power Supply**

Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz
MCA	0.44 A
MOCP/Breaker Size	6 A


**Refrigerant and Piping**

Refrigerant Type	R410A
Gas Pipe Size (OD)	5/8-in
Liquid Pipe Size (OD)	3/8-in
Drain Pipe Size (OD)	1-in
Connection Method	Flared

## DIMENSIONAL SPECIFICATIONS

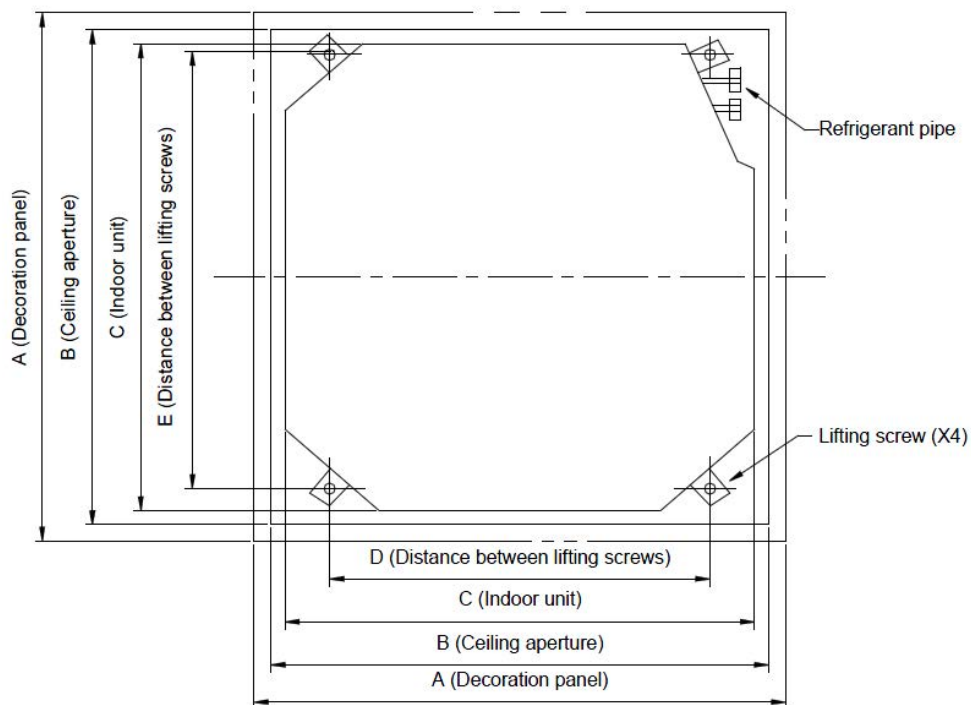

	A	B	C	D	E	G	H
mm	950	890	840	680	780	65	340
inch	37-3/8	35-1/16	33-1/16	26-3/4	30-11/16	2-1/2	13-3/8

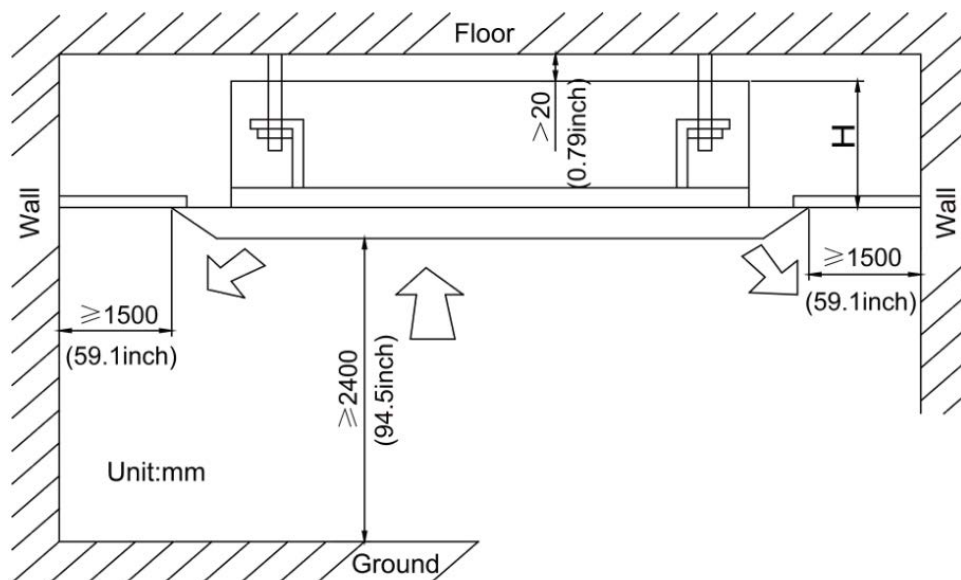

**Notes:**

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.