

Submittal Data: TVRF-IEWM24KPH 24,000 BTU/h Wall Mounted evaporator

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Unit Designation	Schedule No.	

GENERAL FEATURES

- Comfortable and Balanced Airflow, Movable (up and down) Air Outlets
- Triple Defense for Better Purification
- Cold Air Prevention Design
- Protection Functions



Performance

Cooling	
Rated Capacity	24,000 BTU/h 7.03 kW
Heating	
Rated Capacity	25,500 BTU/h 7.47 kW

Unit Data

Fan	
Type	Cross-flow
Output Power	35 W
FLA	0.34 A
Airflow	
	440 CFM 750 m ³ /h
Sound Pressure Level	
High / Low	44/38 dB(A)
Dimensions & Weights	
Unit Dimensions(WxHxD)	39.69×8.01×12.56-in 1008×221×319 mm
Weight (Net/Gross)	33.08/40.79 LBS 15/18.5 kg



Electrical & Power Supply

Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz
MCA	0.3875 A
MOCP/Breaker Size	6 A



Refrigerant and Piping

Refrigerant Type	R410A
Gas Pipe Size (OD)	5/8-in
Liquid Pipe Size (OD)	3/8-in
Drain Pipe Size (OD)	1 1/4-in
Connection Method	Flared

DIMENSIONAL SPECIFICATIONS

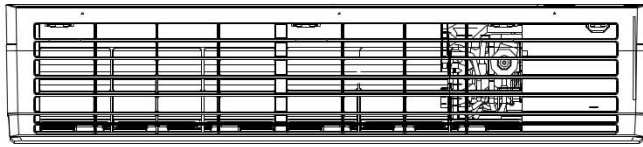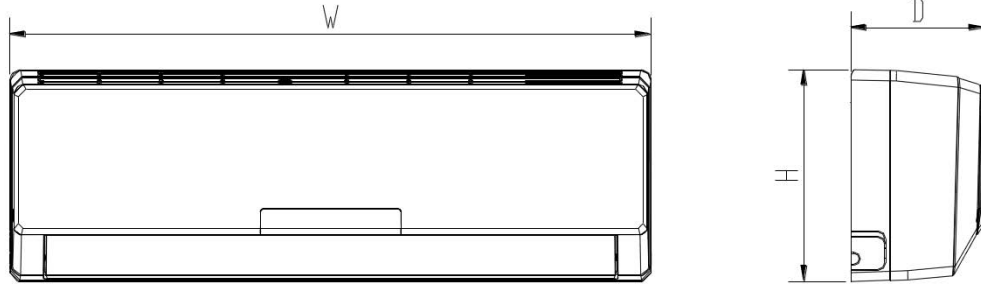

—	W	H	D
mm	1008	221	319
inch	39.69	8.7	12.56

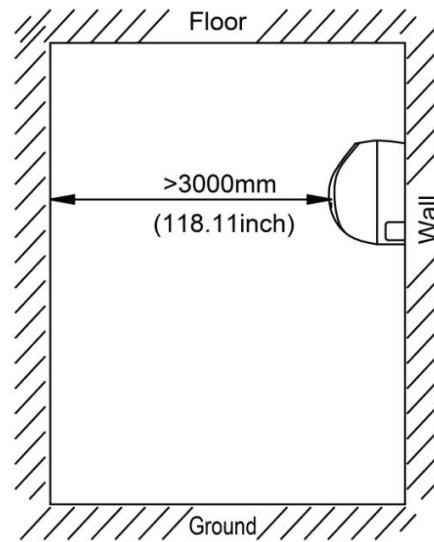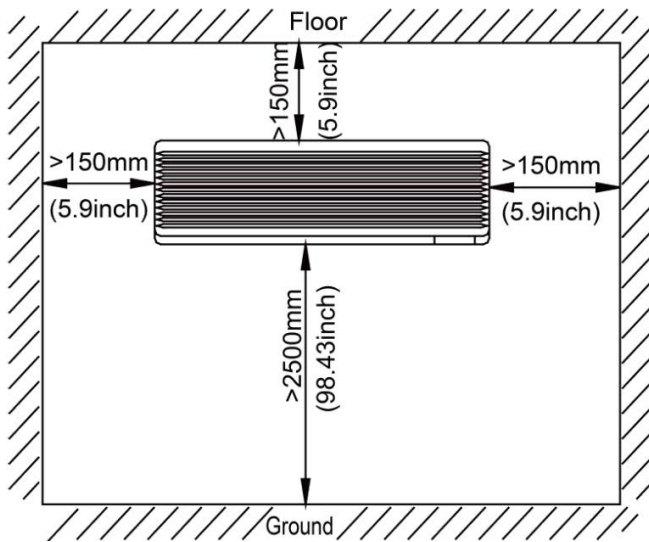

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.