

Light Commercial

MODEL I/O: TU42HTI/TU42H30

TOSOT

Job Name:

Engineer Name:

System No:

- File       Resubmit  
 Approval    Other

Location:

Contractor:

Date:

**General Features**

- Compact Design
- Wide Discharge Range
- Microcomputer Control
- Easy Maintenance
- Flexible Installation
- Comfortable Airflow



**Unit Performance:**

<i>Cooling:</i>	
Capacity (Min-Rated-Max, Btu/h)	12,000-39,500-42,500
SEER	16
EER	9.75
<i>Heating:</i>	
Capacity (Min-Rated-Max, Btu/h)	13,000-44,000-52,500
HSPF	9
COP (W/W)	3.21

\*\*\*\*

**Unit Specification**

Refrigerant Type	R410A
Refrigerant Charge (oz)	130.54
ODU Sound Pressure (dB(A))	61
IDU Sound Pressure (dB(A))	55/52/47
ODU Net Weight (lbs)	209.5
IDU Net Weight (lbs)	110.3
Dehumidifying (Pint/h)	3.4

*Fan*

ODU / IDU Type	Axial-flow/Centrifugal
Quantity (ODU + IDU)	2+3
Motor/Drive	Direct Drive
ODU Max Air Flow Rate (CFM)	3880
IDU Air Flow Rate (CFM)	1115

**Compressor**

Cooling Operation Ambient temp. Range	0~115 °F
Heating Operation Ambient temp. Range	0~75 °F
Compressor Type	Inverter Rotary
Fan Motor Power Output (HP)	1/6 x 2
Crankcase Heater	Yes

**Electrical Specification**

Power Supply	208-230V / 60Hz
Communications Wire Size(ODU/IDU)	AWG 10/17
MOP (A)	50
MCA (A)	31
Cooling Rated Amps (A)	24.55
Heating Rated Amps (A)	24.81
Compressor RLA (A)	21.2
Indoor Fan Motor Full Load Amp (A)	2.1
Outdoor Fan Motor Full Load Amp (A)	2 x 2
Nominal Cooling Power Input (kW)	4.15
Nominal Heating Power Input (kW)	3.9


*Piping*

Liquid Line (in, OD)	3/8
Gas Line (in, OD)	5/8
Additional Refrigerant (oz./ft.)	0.6
Max Pipe Length (ft.)	164
Piping Length (no add'l refrigerant, ft.)	25
Max Elevation (ft.)	98.4


AHRI Certification Ref #



Cooling Performance F / %

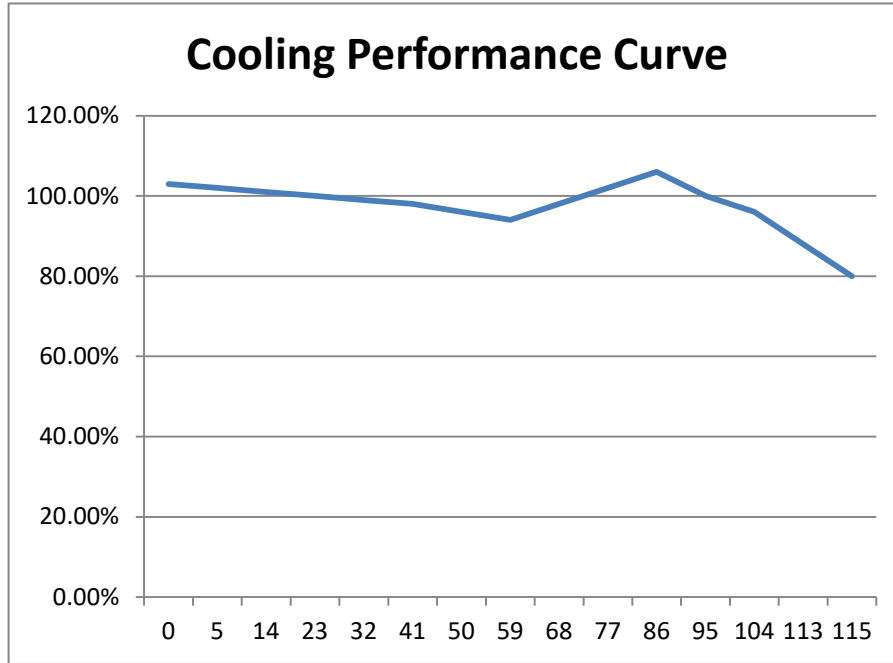

Heating Performance F / %

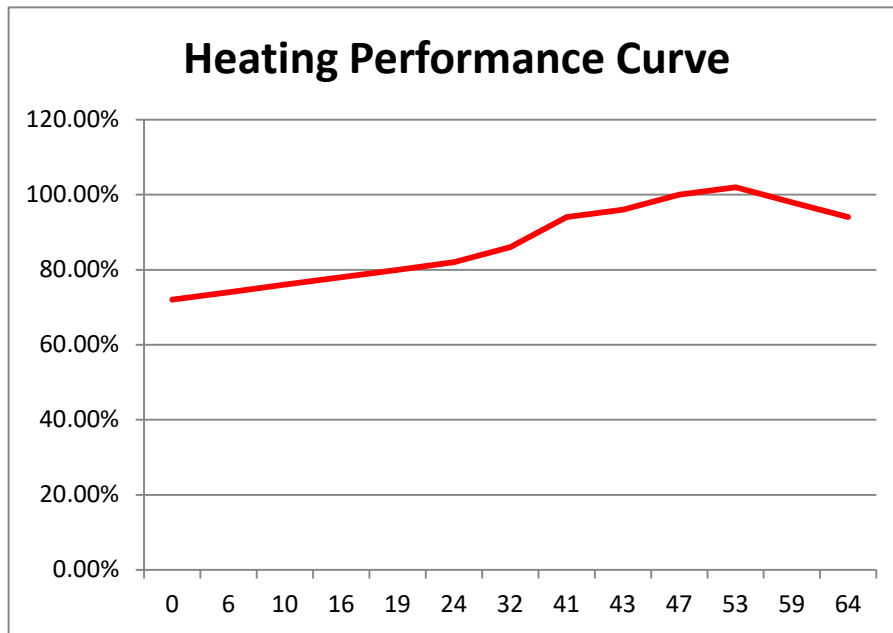



Light Commercial

MODEL I/O: TU42HTI/TU42H30



**TOSOT**

**Outline Dimension Diagram**

	mm	(inch)
A	1420	(55-7/8)
B	245	(9-5/8)
C	1354	(53-1/4)
D	280	(11)
H	700	(27-1/2)

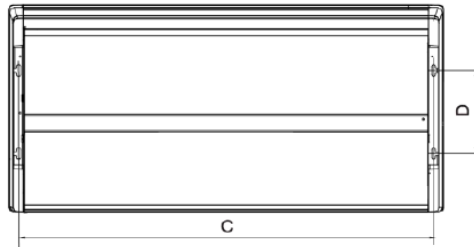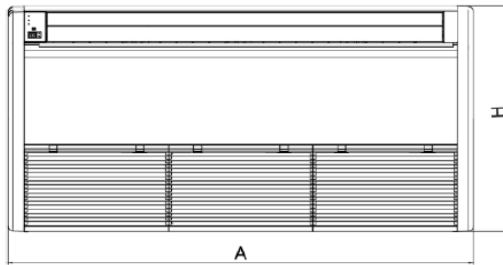

A	958	(37-3/4)
B	412	(16-1/4)
C	1349	(53-1/8)
D	572	(22-1/2)
E	376	(14-3/4)

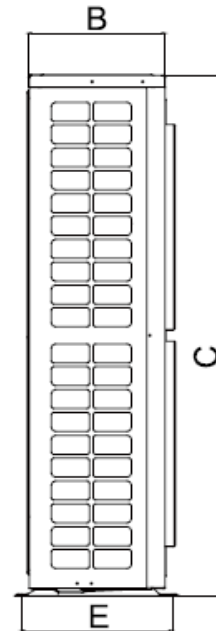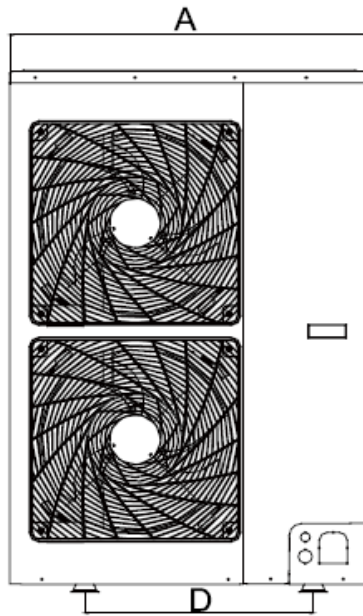

**GLOSSARY**

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

HSPF - Heating Seasonal Performance Factor

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity

**TOSOT**

5965 Chemin de la Côte de Liesse  
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

[info@tosotusa.com](mailto:info@tosotusa.com)

[www.tosotusa.com](http://www.tosotusa.com)