

VRF Indoor	MODEL: TVRF-IE2WC09KHP	<b>TOSOT</b>
------------	------------------------	--------------

Job Name: \_\_\_\_\_  
 Engineer Name: \_\_\_\_\_  
 System No: \_\_\_\_\_

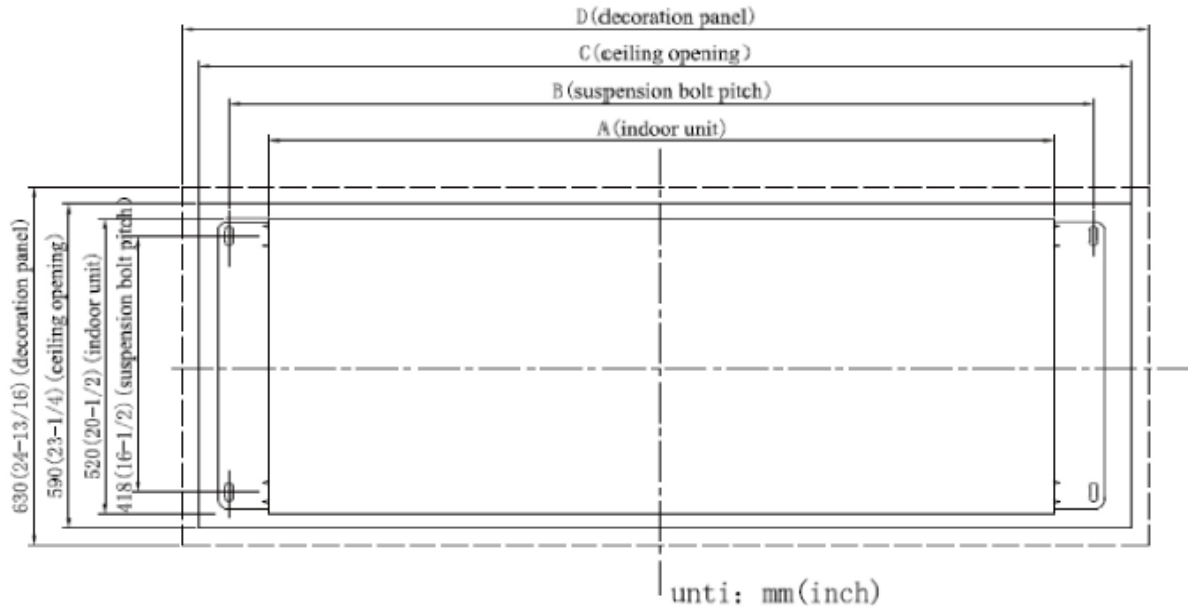
Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Date: \_\_\_\_\_

**Indoor VRF SYSTEM FEATURES**

- \* Strong And Balanced Airflow
- \* Ultra-Low Noise Operation
- \* Intelligent Drainage
- \* DC inverter Motor
- \* Protection Function
- \* Condensate Pump



Specifications		Model Name
Unit Type		TVRF-IE2WC09KHP
Cooling Capacity	Btu/h	9,500
Heating Capacity	Btu/h	10,500
External Dimensions (WxHxD)	In.	47 1/5 x 20 1/2 x 13 2/5
	mm	340 x 1443 x 630
Net Weight	Lbs. / Kg	95/43
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.055
Power Heating Consumption	kW	0.055
Current Cooling	A	0.6
Current Heating	A	0.6
Minimum Circuit Ampacity (MCA)	A	1
Maximum Overcurrent Protection (MOCP)	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	1/4 - 6.35
	Gas (Low Pressure)	3/8 - 9.52
Sound Pressure Level	dB(A)	35/33/31
<b><u>Fan</u></b>		
Type x Quantity		Centrifugalx3
Airflow Rate	CFM	490/355/312
<b><u>Motor</u></b>		
Motor Type x Quantity		BLDCx1
Motor Output	kW	0.09
Refrigerant		R410A
Coil Type		Fenestrate plain film --hydrophilic film
Unit Color		silver

**Outline Dimension Diagram**

	A	B	C	D
mm	1200	1252	1403	1443
inch	47 1/4	49 1/4	55 1/4	56 3/4

**TOSOT**

5965 Chemin de la Côte de Liesse  
Saint Laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

[info@tosotusa.com](mailto:info@tosotusa.com)

[www.tosotusa.com](http://www.tosotusa.com)