

VRF Indoor	MODEL: TVRF-IE2WC24KHP	TOSOT
------------	------------------------	--------------

Job Name: _____
 Engineer Name: _____
 System No: _____

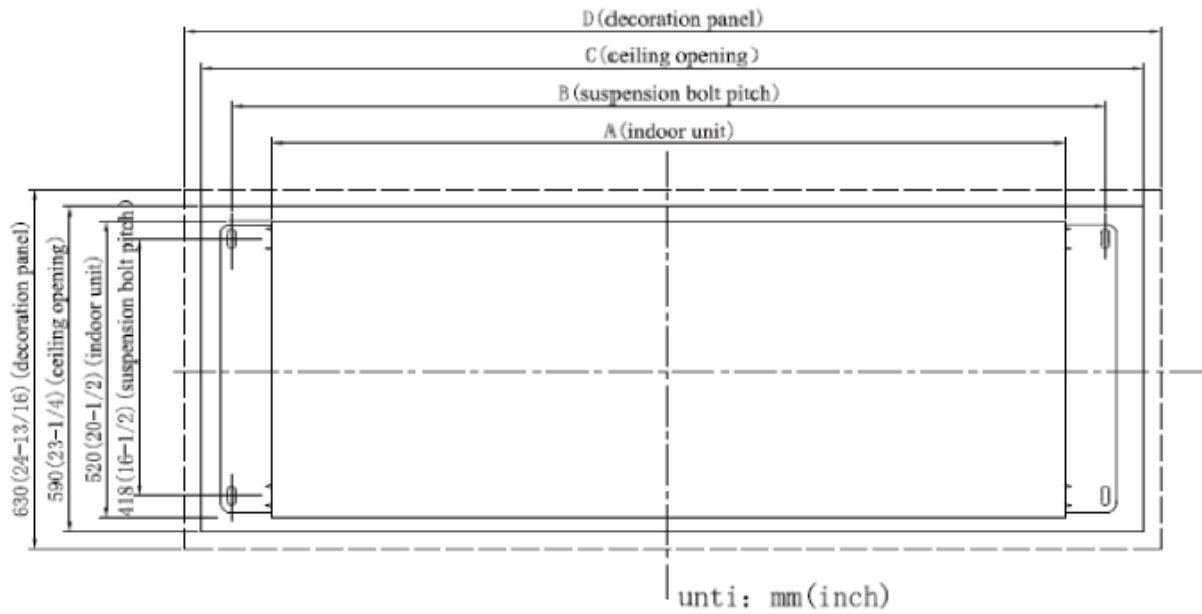
Location: _____
 Contractor: _____
 Date: _____

Indoor VRF SYSTEM FEATURES

- * Strong And Balanced Airflow
- * Ultra-Low Noise Operation
- * Intelligent Drainage
- * DC inverter Motor
- * Protection Function
- * Condensate Pump



Specifications		Model Name
Unit Type		TVRF-IE2WC24KHP
Cooling Capacity	Btu/h	24,000
Heating Capacity	Btu/h	27,000
External Dimensions (WxHxD)	In.	47 1/5 x 20 1/2 x 13 2/5
	mm	340 x 1443 x 630
Net Weight	Lbs. / Kg	101/46
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.091
Power Heating Consumption	kW	0.091
Current Cooling	A	0.7
Current Heating	A	0.7
Minimum Circuit Ampacity (MCA)	A	1
Maximum Overcurrent Protection (MOCP)	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	39/37/35
<u>Fan</u>		
Type x Quantity		Centrifugalx3
Airflow Rate	CFM	650/483/448
<u>Motor</u>		
Motor Type x Quantity		BLDCx1
Motor Output	kW	0.09
Refrigerant		R410A
Coil Type		Fenestrate plain film --hydrophilic film
Unit Color		silver

Outline Dimension Diagram

	A	B	C	D
mm	1200	1252	1403	1443
inch	47 1/4	49 1/4	55 1/4	56 3/4

TOSOT

5965 Chemin de la Côte de Liesse
Saint Laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com