

VRF Indoor	MODEL: TVRF-IE4WC24KHP	<b>TOSOT</b>
------------	------------------------	--------------

Job Name: \_\_\_\_\_  
 Engineer Name: \_\_\_\_\_  
 System No: \_\_\_\_\_

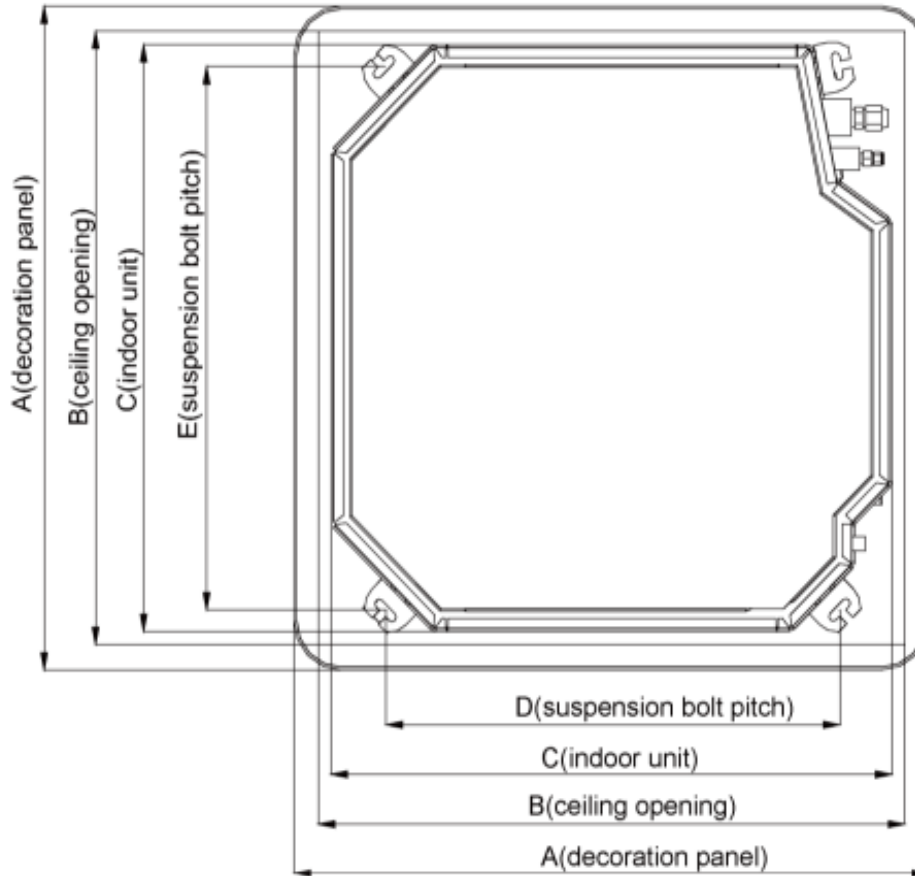
Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Date: \_\_\_\_\_

**Indoor VRF SYSTEM FEATURES**

- \* Strong And Balanced Airflow
- \* Ultra-Low Noise Operation
- \* Intelligent Drainage
- \* DC inverter Motor
- \* Protection Function



Specifications		Model Name
Unit Type		TVRF-IE4WC24KHP
Cooling Capacity	Btu/h	24,000
Heating Capacity	Btu/h	27,000
External Dimensions (WxHxD)	In.	33-1/8 x 33-1/8 x 9-1/2
	mm	840 x 840 x 240
Net Weight	Lbs. / Kg	58/26.5
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.068
Power Heating Consumption	kW	0.068
Current Cooling	A	0.5
Current Heating	A	0.5
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	38/36/33
<b><u>Fan</u></b>		
Type x Quantity		Centrifugal×1
Airflow Rate	CFM	695/590/470
<b><u>Motor</u></b>		
Motor Type x Quantity		BLDC×1
Motor Output	kW	0.045
Refrigerant		R410A
Coil Type		Fenestrate plain film --hydrophilic film
Unit Color		Silver

**Outline Dimension Diagram**

	A	B	C	D	E
mm	950	890	840	680	780
inch	37 3/8	35	33 1/8	26 3/4	30 3/4

**TOSOT**

5965 Chemin de la Côte de Liesse  
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

[info@tosotusa.com](mailto:info@tosotusa.com)

[www.tosotusa.com](http://www.tosotusa.com)