

VRF Indoor	MODEL: TVRF-IE4WC36KHP	TOSOT
------------	------------------------	--------------

Job Name: _____
 Engineer Name: _____
 System No: _____

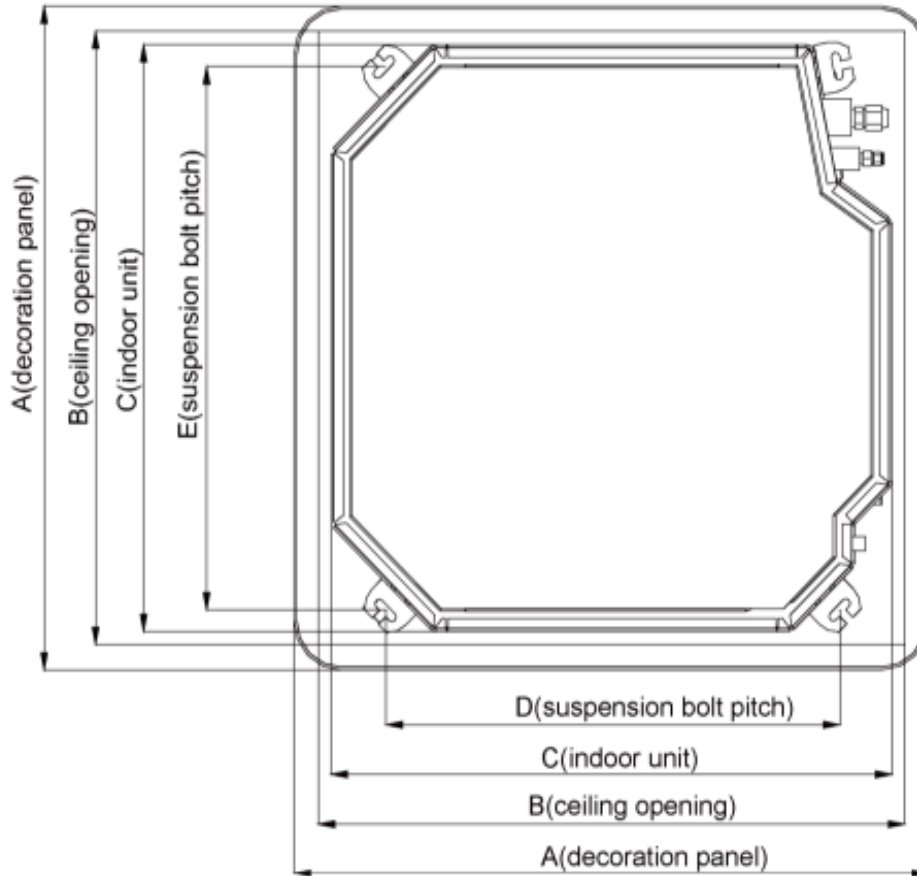
Location: _____
 Contractor: _____
 Date: _____

Indoor VRF SYSTEM FEATURES

- * Strong And Balanced Airflow
- * Ultra-Low Noise Operation
- * Intelligent Drainage
- * DC inverter Motor
- * Protection Function



Specifications		Model Name
Unit Type		TVRF-IE4WC36KHP
Cooling Capacity	Btu/h	36,000
Heating Capacity	Btu/h	40,000
External Dimensions (WxHxD)	In.	33-1/8 x 33-1/8 x 12-5/8
	mm	841.3 x 841.3 x 320.6
Net Weight	Lbs. / Kg	72/32.5
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.11
Power Heating Consumption	kW	0.11
Current Cooling	A	0.9
Current Heating	A	0.9
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	41/38/36
<u>Fan</u>		
Type x Quantity		Centrifugalx1
Airflow Rate	CFM	1000/825/650
<u>Motor</u>		
Motor Type x Quantity		BLDCx1
Motor Output	kW	0.075
Refrigerant		R410A
Coil Type		Fenestrate plain film --hydrophilic film
Unit Color		Silver

Outline Dimension Diagram

	A	B	C	D	E
mm	950	890	840	680	780
inch	37 3/8	35	33 1/8	26 3/4	30 3/4

TOSOT

5965 Chemin de la Côte de Liesse
Saint Laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com