

VRF Indoor	MODEL: TVRF-IECS12KHP	TOSOT
------------	-----------------------	--------------

Job Name: _____
 Engineer Name: _____
 System No: _____

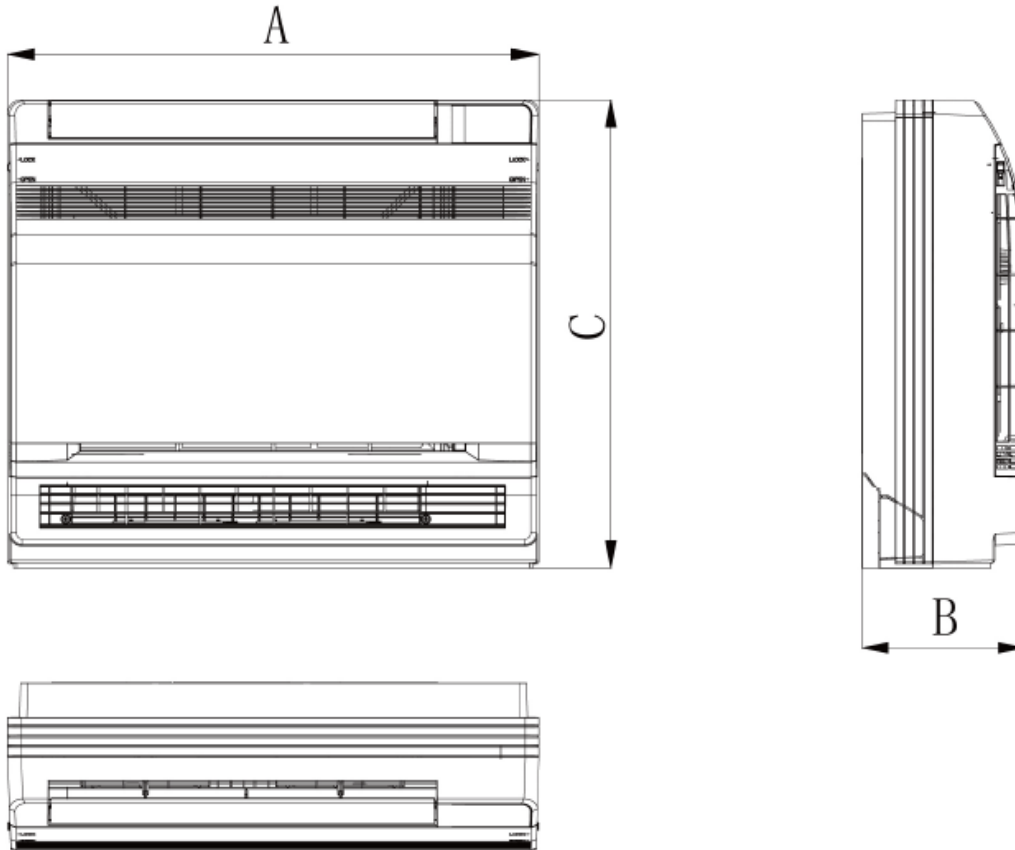
Location: _____
 Contractor: _____
 Date: _____

Indoor VRF SYSTEM FEATURES

- * Multiple Fan Speed
- * Detached Grille And Long Life Filter



Specifications		Model Name
Unit Type		TVRF-IECS12KHP
Cooling Capacity	Btu/h	12,000
Heating Capacity	Btu/h	13,500
External Dimensions (WxHxD)	In.	27-1/2 x 23-5/8 x 8-1/2
	mm	700 x 600 x 215
Net Weight	Lbs. / Kg	35/16
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.02
Power Heating Consumption	kW	0.02
Current Cooling	A	0.25
Current Heating	A	0.25
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	1/4 - 6.35
	Gas (Low Pressure)	3/8 - 9.52
Sound Pressure Level	dB(A)	40
<u>Fan</u>		
Type x Quantity		Centrifugal x 1
Airflow Rate	CFM	282
<u>Motor</u>		
Motor Type x Quantity		Direct-driven x 1
Motor Output	kW	30
Refrigerant		R410A
Coil Type		Cross Fin
Unit Color		White

Outline Dimension Diagram

	A	B	C
mm	700	215	600
inch	27 1/2	8 1/2	23 5/8

TOSOT

5965 Chemin de la Côte de Liesse
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com