

VRF Indoor	MODEL: TVRF-IECS18KHP	<b>TOSOT</b>
------------	-----------------------	--------------

Job Name: \_\_\_\_\_  
 Engineer Name: \_\_\_\_\_  
 System No: \_\_\_\_\_

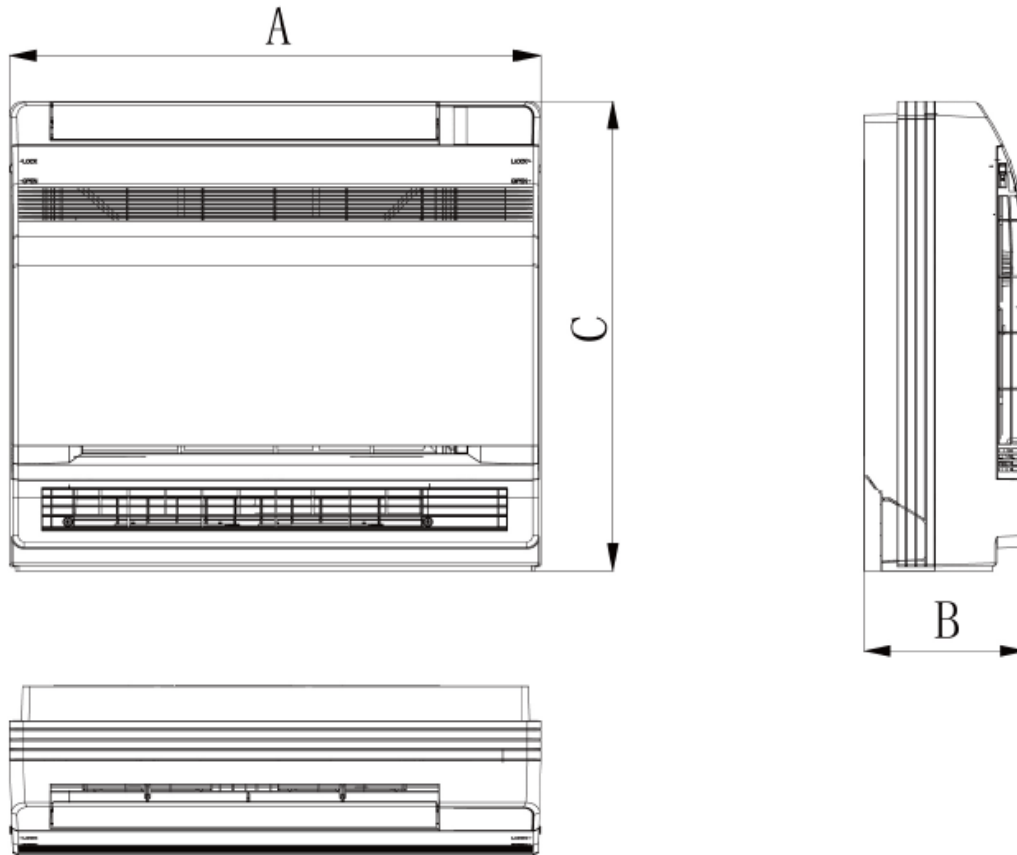
Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Date: \_\_\_\_\_

**Indoor VRF SYSTEM FEATURES**

- \* Multiple Fan Speed
- \* Detached Grille And Long Life Filter



Specifications		Model Name
Unit Type		TVRF-IECS18KHP
Cooling Capacity	Btu/h	18,000
Heating Capacity	Btu/h	20,000
External Dimensions (WxHxD)	In.	27-1/2 x 23-5/8 x 8-1/2
	mm	700 x 600 x 215
Net Weight	Lbs. / Kg	35/16
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.04
Power Heating Consumption	kW	0.04
Current Cooling	A	0.4
Current Heating	A	0.4
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	1/4 - 6.35
	Gas (Low Pressure)	1/2 - 12.7
Sound Pressure Level	dB(A)	46
<b><u>Fan</u></b>		
Type x Quantity		Centrifugal x 1
Airflow Rate	CFM	400
<b><u>Motor</u></b>		
Motor Type x Quantity		Direct-driven x 1
Motor Output	kW	30
Refrigerant		R410A
Coil Type		Cross Fin
Unit Color		White

**Outline Dimension Diagram**

	A	B	C
mm	700	215	600
inch	27 1/2	8 1/2	23 5/8

**TOSOT**

5965 Chemin de la Côte de Liesse  
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

[info@tosotusa.com](mailto:info@tosotusa.com)

[www.tosotusa.com](http://www.tosotusa.com)