

| | | |
|------------|-----------------------|--------------|
| VRF Indoor | MODEL: TVRF-IEFC09KHP | TOSOT |
|------------|-----------------------|--------------|

Job Name: _____
 Engineer Name: _____
 System No: _____

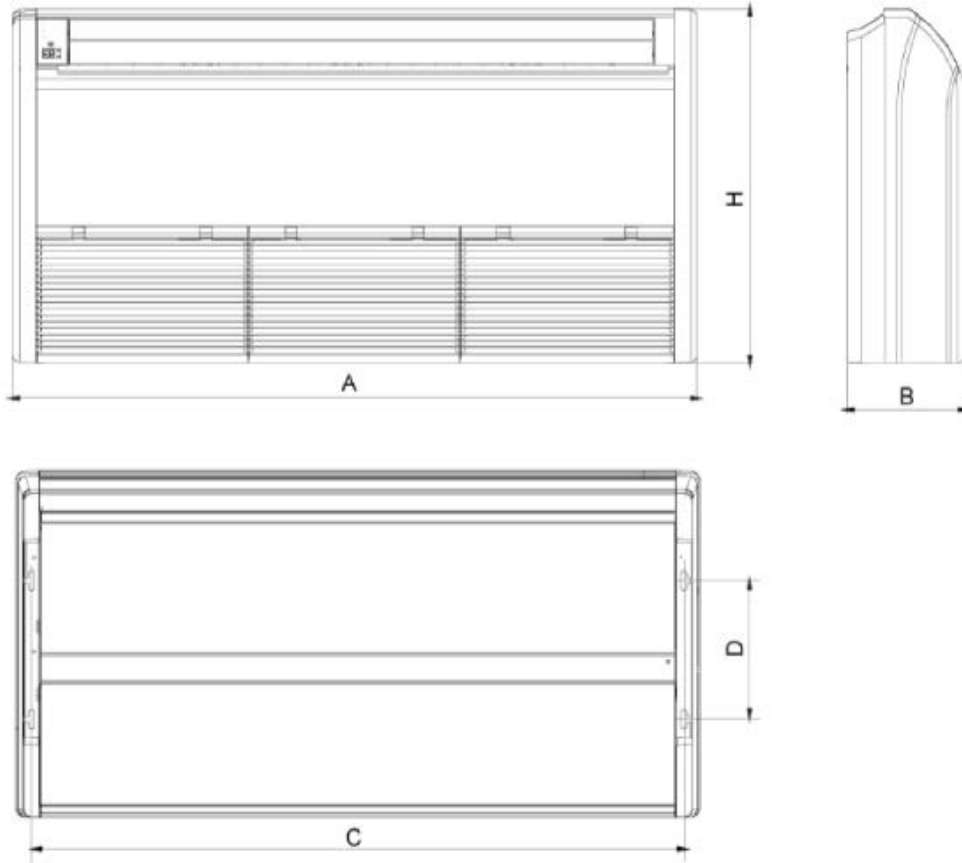
Location: _____
 Contractor: _____
 Date: _____

Indoor VRF SYSTEM FEATURES

- * Hoisted Or Seated, Flexible Installation
- * Beautiful Appearance
- * Protection Function
- * Horizontal And Vertical Air Swing



| Specifications | | Model Name |
|---|------------------------|--------------------------|
| Unit Type | | TVRF-IEFC09KHP |
| Cooling Capacity | Btu/h | 9,500 |
| Heating Capacity | Btu/h | 10,500 |
| External Dimensions (HxWxD) | In. | 48 x 27 9/16 x 8 7/8 |
| | mm | 1220x700x225 |
| Net Weight | Lbs. / Kg | 88/40 |
| Electrical Power Requirements | Voltage, Phase, Hertz | 208/230V, 1-phase, 60HZ |
| Power Cooling Consumption | kW | 0.04 |
| Power Heating Consumption | kW | 0.04 |
| Current Cooling | A | 0.5 |
| Current Heating | A | 0.5 |
| Minimum Circuit Ampacity (MCA) | A | 1 |
| Max. Overcurrent Protection (MOCP) Fuse | A | 15 |
| Refrigerant Piping Dimensions (In./mm) | Liquid (High Pressure) | 1/4 - 6.35 |
| | Gas (Low Pressure) | 3/8 - 9.52 |
| Sound Pressure Level | dB(A) | 36/34/32 |
| <u>Fan</u> | | |
| Type x Quantity | | Centrifugal*4 |
| Airflow Rate | CFM | 380/345/305 |
| <u>Motor</u> | | |
| Motor Type x Quantity | | BLDC FG60A-ZL x 1 |
| Motor Output | kW | 0.06 |
| Refrigerant | | R410A |
| Coil Type | | Aluminum fin-copper tube |
| Unit Color | | White |

Outline Dimension Diagram

| | A | B | C | D | H |
|------|------|-------|--------|-----|--------|
| mm | 1220 | 225 | 1158 | 280 | 700 |
| inch | 48 | 8 7/8 | 45 5/8 | 11 | 27 1/2 |

TOSOT

5965 Chemin de la Côte de Liesse
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com