

VRF Indoor	MODEL: TVRF-IEFC30KHP	<b>TOSOT</b>
------------	-----------------------	--------------

Job Name: \_\_\_\_\_  
 Engineer Name: \_\_\_\_\_  
 System No: \_\_\_\_\_

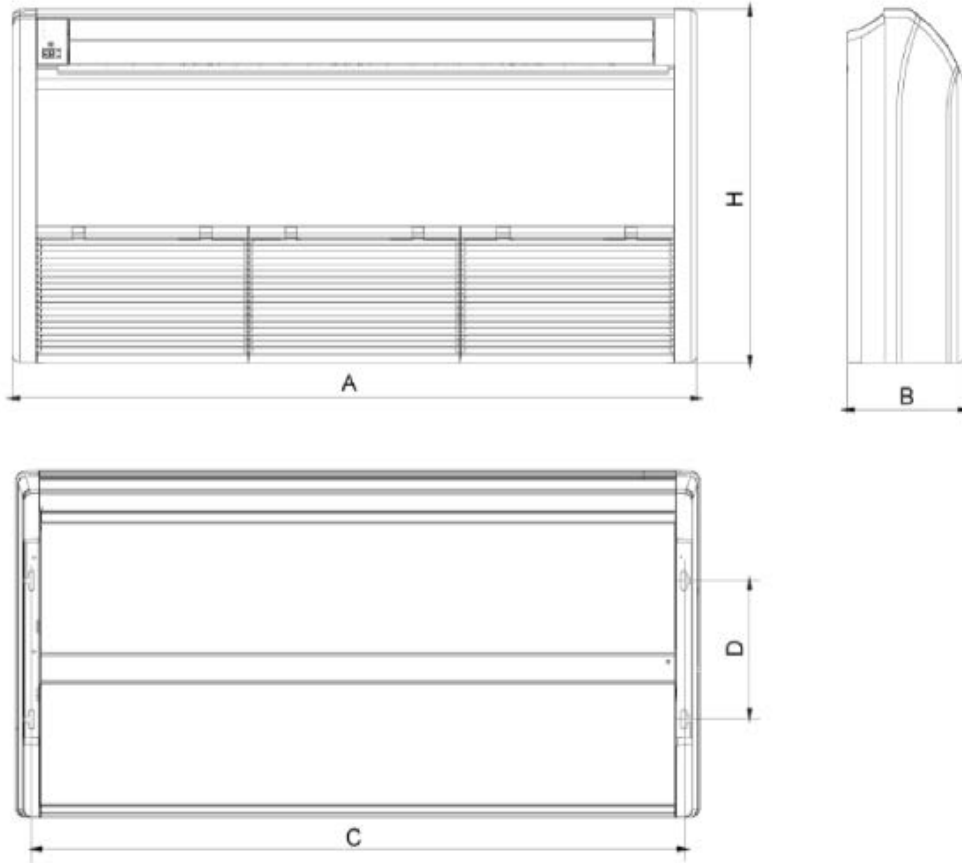
Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Date: \_\_\_\_\_

**Indoor VRF SYSTEM FEATURES**

- \* Hoisted Or Seated, Flexible Installation
- \* Beautiful Appearance
- \* Protection Function
- \* Horizontal And Vertical Air Swing



Specifications		Model Name
Unit Type		TVRF-IEFC30KHP
Cooling Capacity	Btu/h	30,000
Heating Capacity	Btu/h	33,000
External Dimensions (WxHxD)	In.	55-7/8 x 27-1/2 x 9-5/8
	mm	1420x700x245
Net Weight	Lbs. / Kg	110/50
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.14
Power Heating Consumption	kW	0.14
Current Cooling	A	0.6
Current Heating	A	0.6
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	50/46/43
<b><u>Fan</u></b>		
Type x Quantity		Centrifugal x 3
Airflow Rate	CFM	940/850/685
<b><u>Motor</u></b>		
Motor Type x Quantity		BLDC FG150A-ZL x 1
Motor Output	kW	0.15
Refrigerant		R410A
Coil Type		Aluminum fin-copper tube
Unit Color		White

**Outline Dimension Diagram**

	A	B	C	D	H
mm	1420	245	1354	280	700
inch	55 7/8	9 5/8	53 1/4	11	27 1/2

**TOSOT**

5965 Chemin de la Côte de Liesse  
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

[info@tosotusa.com](mailto:info@tosotusa.com)

[www.tosotusa.com](http://www.tosotusa.com)