

VRF Indoor	MODEL: TVRF-IEFC42KHP	TOSOT
------------	-----------------------	--------------

Job Name: _____
 Engineer Name: _____
 System No: _____

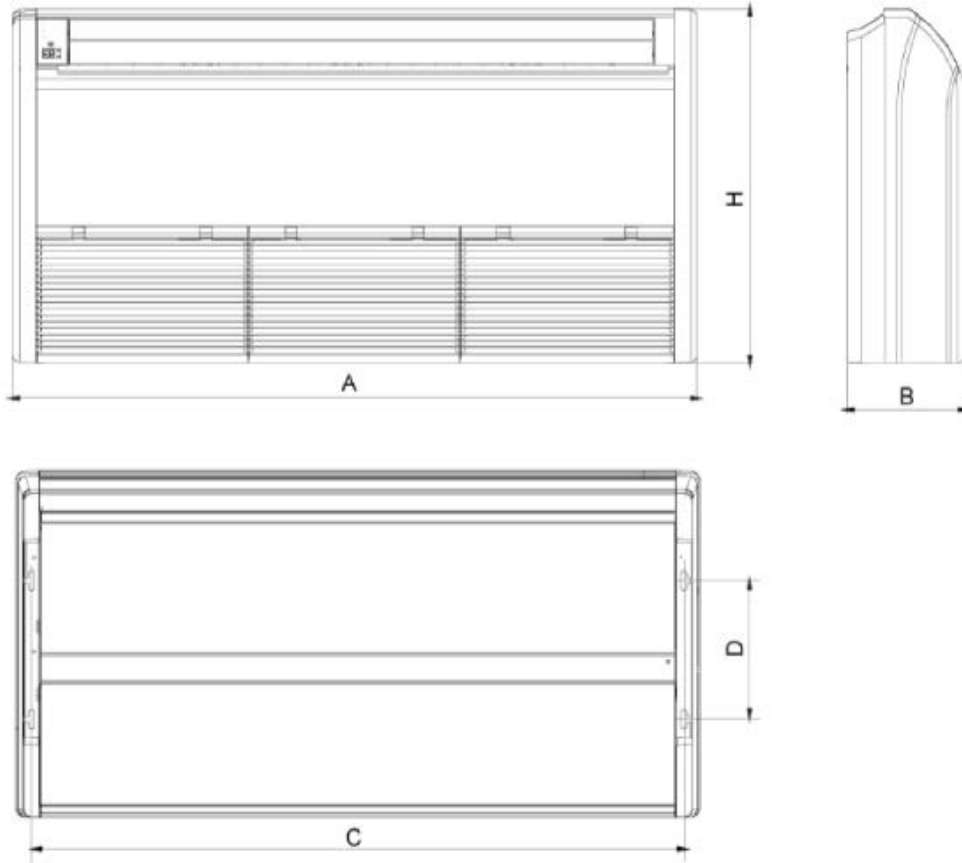
Location: _____
 Contractor: _____
 Date: _____

Indoor VRF SYSTEM FEATURES

- * Hoisted Or Seated, Flexible Installation
- * Beautiful Appearance
- * Protection Function
- * Horizontal And Vertical Air Swing



Specifications		Model Name
Unit Type		TVRF-IEFC42KHP
Cooling Capacity	Btu/h	42,000
Heating Capacity	Btu/h	47,000
External Dimensions (WxHxD)	In.	66-7/8 x 27-1/2 x 9-5/8
	mm	1700x700x245
Net Weight	Lbs. / Kg	132/60
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.16
Power Heating Consumption	kW	0.16
Current Cooling	A	0.7
Current Heating	A	0.7
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	52/48/45
<u>Fan</u>		
Type x Quantity		Centrifugal x 4
Airflow Rate	CFM	1180/1065/855
<u>Motor</u>		
Motor Type x Quantity		BLDC FG250A-ZL x 1
Motor Output	kW	0.25
Refrigerant		R410A
Coil Type		Aluminum fin-copper tube
Unit Color		White

Outline Dimension Diagram

	A	B	C	D	H
mm	1700	245	1634	280	700
inch	66 7/8	9 5/8	64 3/8	11	27 1/2

TOSOT

5965 Chemin de la Côte de Liesse
 Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com