

VRF Indoor	MODEL: TVRF-IEFC48KHP	<b>TOSOT</b>
------------	-----------------------	--------------

Job Name: \_\_\_\_\_  
 Engineer Name: \_\_\_\_\_  
 System No: \_\_\_\_\_

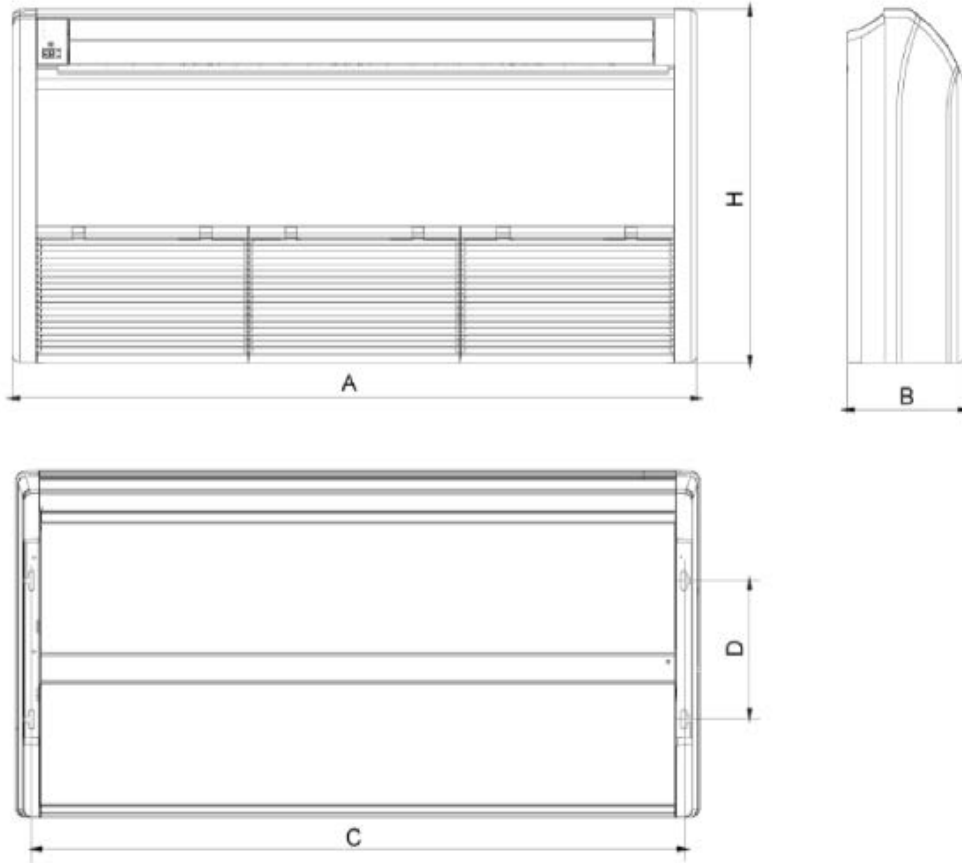
Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Date: \_\_\_\_\_

**Indoor VRF SYSTEM FEATURES**

- \* Hoisted Or Seated, Flexible Installation
- \* Beautiful Appearance
- \* Protection Function
- \* Horizontal And Vertical Air Swing



Specifications		Model Name
Unit Type		TVRF-IEFC48KHP
Cooling Capacity	Btu/h	48,000
Heating Capacity	Btu/h	54,000
External Dimensions (WxHxD)	In.	66-7/8 x 27-1/2 x 9-5/8
	mm	1700x700x245
Net Weight	Lbs. / Kg	132/60
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.16
Power Heating Consumption	kW	0.16
Current Cooling	A	0.7
Current Heating	A	0.7
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	52/49/45
<b><u>Fan</u></b>		
Type x Quantity		Centrifugal x 4
Airflow Rate	CFM	1180/1065/855
<b><u>Motor</u></b>		
Motor Type x Quantity		BLDC FG250A-ZL x 1
Motor Output	kW	0.25
Refrigerant		R410A
Coil Type		Aluminum fin-copper tube
Unit Color		White

**Outline Dimension Diagram**

	A	B	C	D	H
mm	1700	245	1634	280	700
inch	66 7/8	9 5/8	64 3/8	11	27 1/2

**TOSOT**

5965 Chemin de la Côte de Liesse  
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

[info@tosotusa.com](mailto:info@tosotusa.com)

[www.tosotusa.com](http://www.tosotusa.com)