

VRF Indoor	MODEL: TVRF-IEHESP D72KHP	<b>TOSOT</b>
------------	---------------------------	--------------

Job Name: \_\_\_\_\_  
 Engineer Name: \_\_\_\_\_  
 System No: \_\_\_\_\_


Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Date: \_\_\_\_\_


**Indoor VRF SYSTEM FEATURES**

- High Static Pressure Design
- Easy Maintenance
- Convenient Installation
- Protection Functions



Specifications		Model Name
Unit Type		TVRF-IEHESP D72KHP
Cooling Capacity	Btu/h	69,000
Heating Capacity	Btu/h	77,000
External Dimensions (WxHxD)	In.	58-3/8 x 31 1/8 x 15-3/16
	mm	1483 x 791 x 385
Net Weight	Lbs. / Kg	181/82
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.8
Power Heating Consumption	kW	0.8
Current Cooling	A	5
Current Heating	A	5
Minimum Circuit Ampacity (MCA)	A	6
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	3/4 - 19.05
Sound Pressure Level	dB(A)	54/52/49
<b><u>Fan</u></b>		
Type x Quantity		Centrifugal x 2
Airflow Rate	CFM	2355/2120/1885
<b><u>Motor</u></b>		
Motor Type x Quantity		Direct Drive x 1
Motor Output	kW	0.75
Refrigerant		R410A
Coil Type		internal groove tube

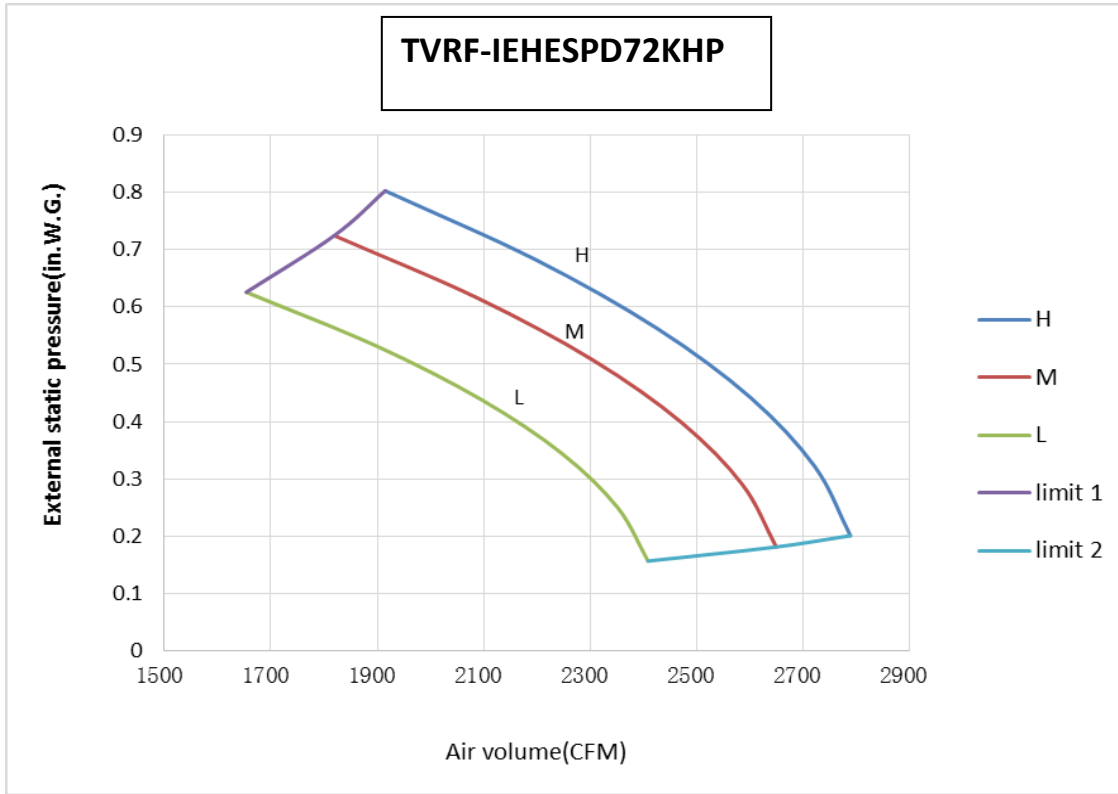

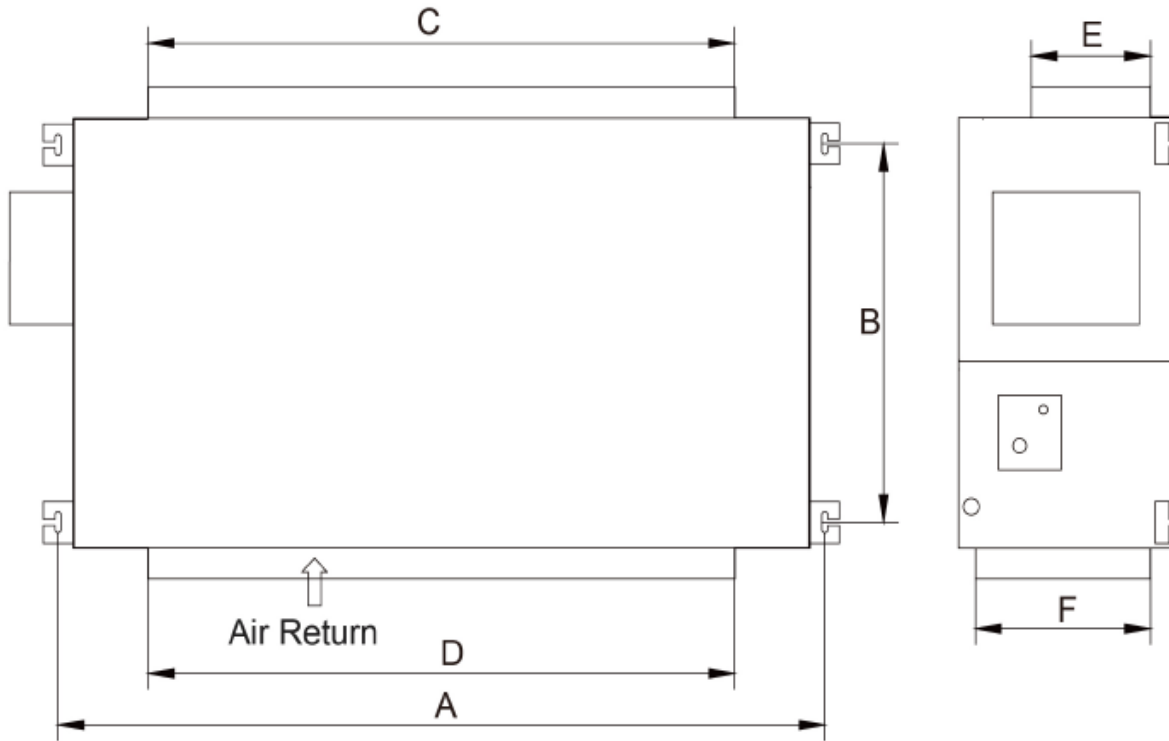**Outline Dimension Diagram**

	A	B	C	D	E	F
mm	1563	706	992	1350	192	402
inch	61 1/2	27 3/4	39	53 1/8	7 1/2	15 7/8

**TOSOT**

5965 Chemin de la Côte de Liesse  
Saint Laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

[info@tosotusa.com](mailto:info@tosotusa.com)

[www.tosotusa.com](http://www.tosotusa.com)