

VRF Indoor	MODEL: TVRF-IELESPD09KHP	TOSOT
------------	--------------------------	--------------

Job Name: _____
 Engineer Name: _____
 System No: _____


Location: _____
 Contractor: _____
 Date: _____


Indoor VRF SYSTEM FEATURES

- Low Static Pressure
- Intelligent Drainage Device
- Convenient Installation
- Protection Functions



Specifications		Model Name
Unit Type		TVRF-IELESPD09KHP
Cooling Capacity	Btu/h	9,500
Heating Capacity	Btu/h	10,500
External Dimensions (WxHxD)	In.	27-1/2 x 24-1/4 x 7-7/8
	mm	700 x 615 x 200
Net Weight	Lbs. / Kg	51/23
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.043
Power Heating Consumption	kW	0.043
Current Cooling	A	0.3
Current Heating	A	0.3
Minimum Circuit Ampacity (MCA)	A	3.15
Max Overcurrent Protection (MOCP) Fuse	A	6
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	1/4 - 6.35
	Gas (Low Pressure)	1/2 - 12.7
Sound Pressure Level	dB(A)	31/29/25
<u>Fan</u>		
Type x Quantity		Centrifugal x 2
Airflow Rate	CFM	265/235/150
<u>Motor</u>		
Motor Type x Quantity		Direct Drive x 1
Motor Output	kW	0.06
Refrigerant		R410A
Coil Type		internal groove tube

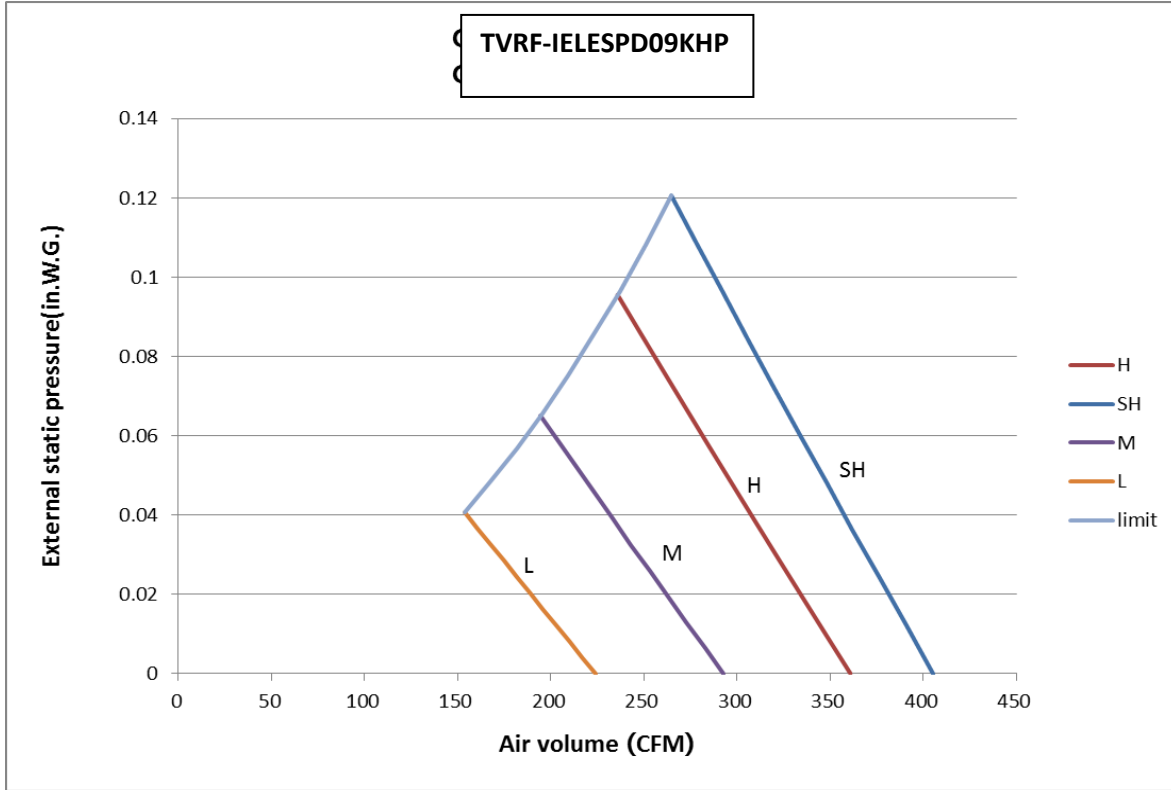

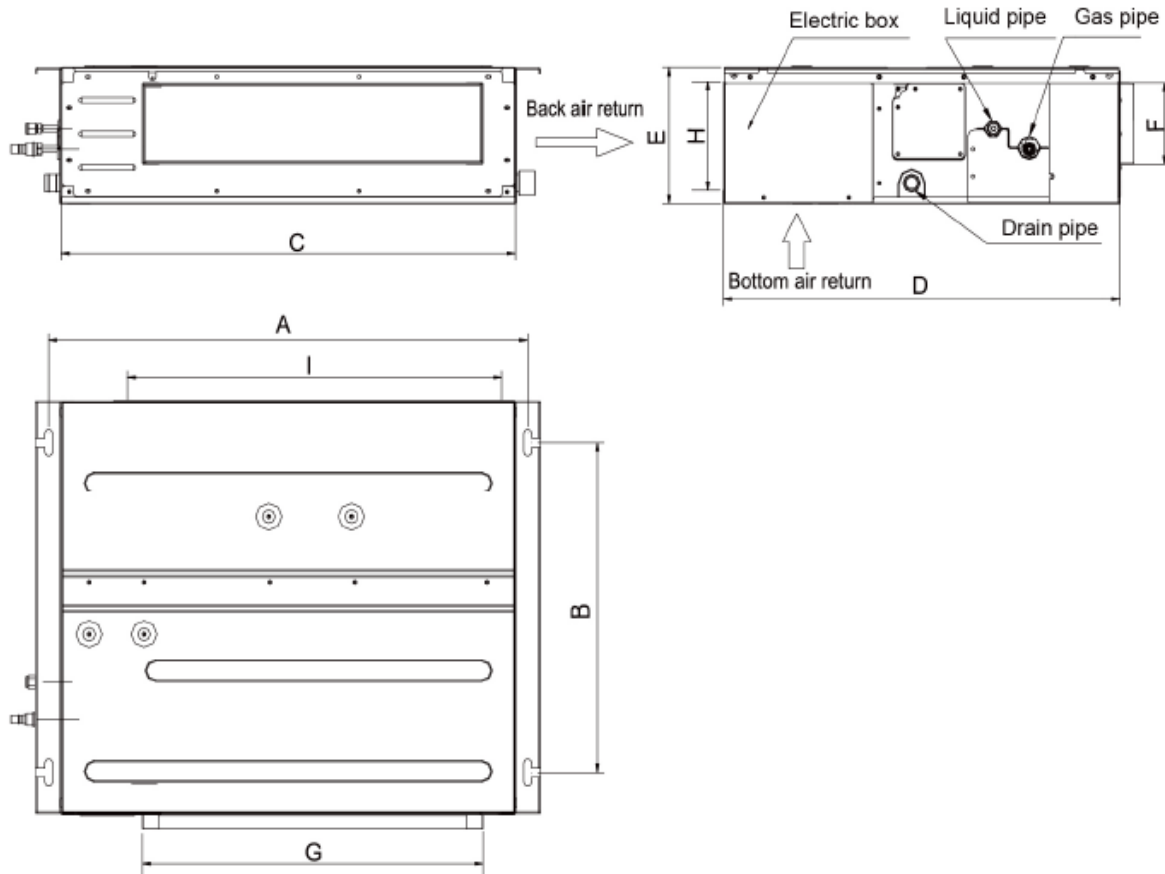Outline Dimension Diagram

	A	B	C	D	E
mm	742	491	700	615	200
inch	29 1/4	19 3/8	27 1/2	24 1/4	7 7/8
	F	G	H	I	
mm	121	528	161	580	
inch	4 3/4	20 3/4	6 3/8	22 7/8	

TOSOT

5965 Chemin de la Côte de Liesse
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com