

VRF Indoor	MODEL: TVRF-IELESPD12KHP	<b>TOSOT</b>
------------	--------------------------	--------------

Job Name: \_\_\_\_\_  
 Engineer Name: \_\_\_\_\_  
 System No: \_\_\_\_\_


Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Date: \_\_\_\_\_


**Indoor VRF SYSTEM FEATURES**

- Low Static Pressure
- Intelligent Drainage Device
- Convenient Installation
- Protection Functions



Specifications		Model Name
Unit Type		TVRF-IELESPD12KHP
Cooling Capacity	Btu/h	12,000
Heating Capacity	Btu/h	13,500
External Dimensions (WxHxD)	In.	27-1/2 x 24-1/4 x 7-7/8
	mm	700 x 615 x 200
Net Weight	Lbs. / Kg	51/23
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.043
Power Heating Consumption	kW	0.043
Current Cooling	A	0.3
Current Heating	A	0.3
Minimum Circuit Ampacity (MCA)	A	3.15
Max Overcurrent Protection (MOCP) Fuse	A	6
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	1/4 - 6.35
	Gas (Low Pressure)	1/2 - 12.7
Sound Pressure Level	dB(A)	32/30/27
<b><u>Fan</u></b>		
Type x Quantity		Centrifugal x 2
Airflow Rate	CFM	325/265/205
<b><u>Motor</u></b>		
Motor Type x Quantity		Direct Drive x 1
Motor Output	kW	0.06
Refrigerant		R410A
Coil Type		internal groove tube

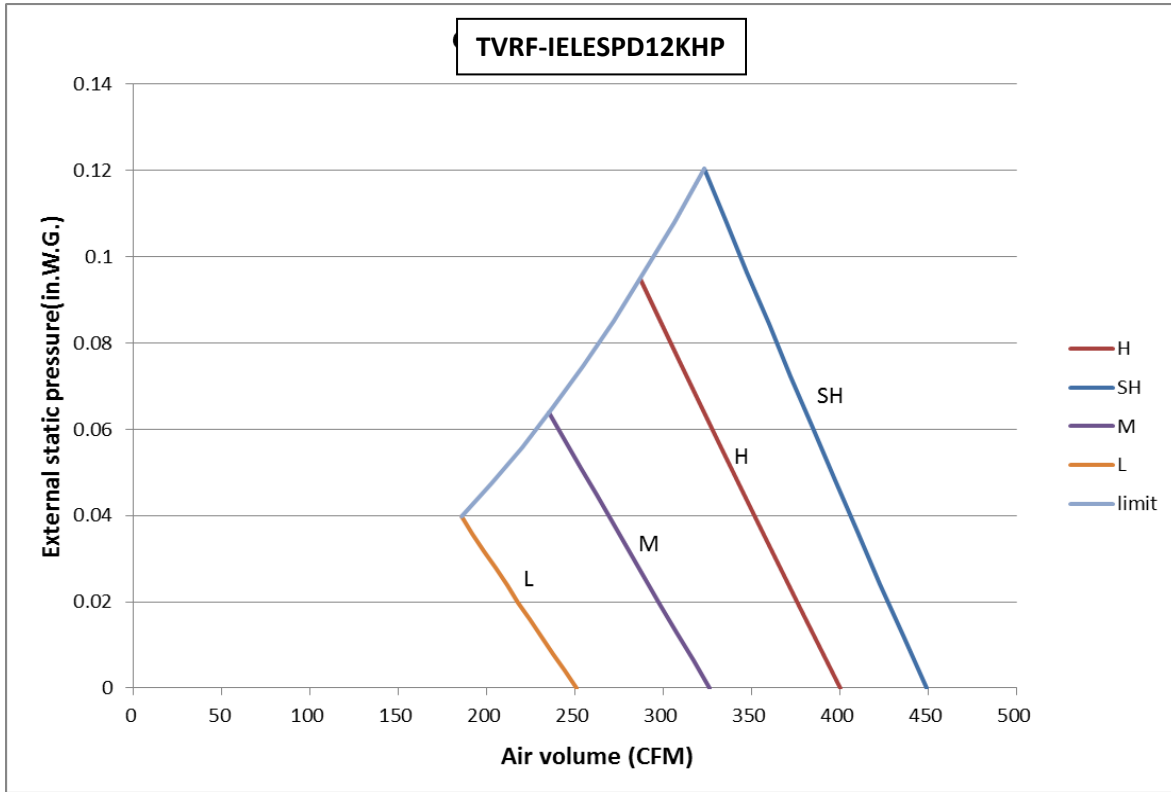

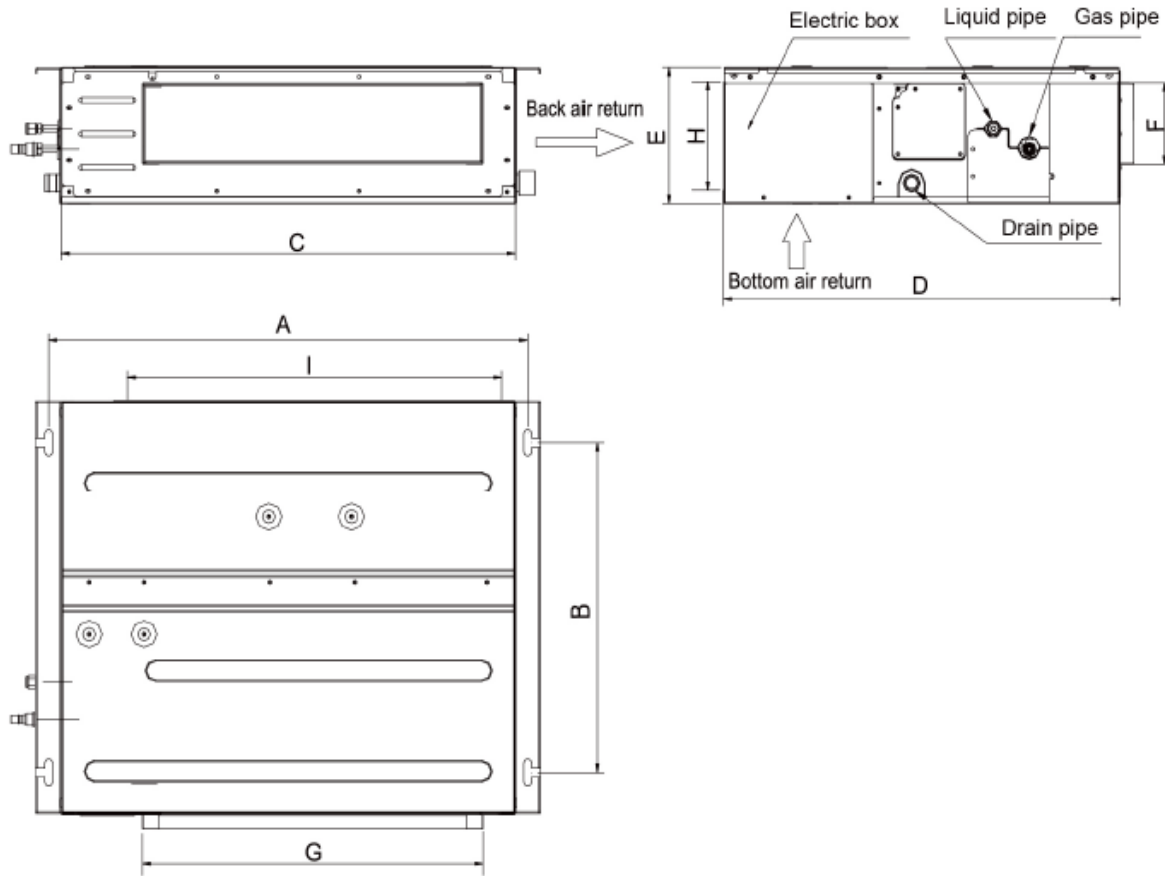**Outline Dimension Diagram**

	A	B	C	D	E
mm	742	491	700	615	200
inch	29 1/4	19 3/8	27 1/2	24 1/4	7 7/8
	F	G	H	I	
mm	121	528	161	580	
inch	4 3/4	20 3/4	6 3/8	22 7/8	

**TOSOT**

5965 Chemin de la Côte de Liesse  
Saint Laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

[info@tosotusa.com](mailto:info@tosotusa.com)

[www.tosotusa.com](http://www.tosotusa.com)