

| | | |
|------------|--------------------------|--------------|
| VRF Indoor | MODEL: TVRF-IELESPD22KHP | TOSOT |
|------------|--------------------------|--------------|

Job Name: _____
 Engineer Name: _____
 System No: _____


Location: _____
 Contractor: _____
 Date: _____


Indoor VRF SYSTEM FEATURES

- Low Static Pressure
- Intelligent Drainage Device
- Convenient Installation
- Protection Functions



| Specifications | | Model Name |
|---|------------------------|-------------------------|
| Unit Type | | TVRF-IELESPD22KHP |
| Cooling Capacity | Btu/h | 22,000 |
| Heating Capacity | Btu/h | 24,000 |
| External Dimensions (WxHxD) | In. | 43-1/4 x 24-1/4 x 7-7/8 |
| | mm | 1100 x 615 x 200 |
| Net Weight | Lbs. / Kg | 69/31 |
| Electrical Power Requirements | Voltage, Phase, Hertz | 208/230V, 1-phase, 60HZ |
| Power Cooling Consumption | kW | 0.099 |
| Power Heating Consumption | kW | 0.099 |
| Current Cooling | A | 0.7 |
| Current Heating | A | 0.7 |
| Minimum Circuit Ampacity (MCA) | A | 3.15 |
| Max Overcurrent Protection (MOCP) Fuse | A | 6 |
| Refrigerant Piping Dimensions (In./mm) | Liquid (High Pressure) | 3/8 - 9.52 |
| | Gas (Low Pressure) | 5/8 - 15.9 |
| Sound Pressure Level | dB(A) | 35/33/30 |
| <u>Fan</u> | | |
| Type x Quantity | | Centrifugal x 4 |
| Airflow Rate | CFM | 590/470/355 |
| <u>Motor</u> | | |
| Motor Type x Quantity | | Direct Drive x 1 |
| Motor Output | kW | 0.06 |
| Refrigerant | | R410A |
| Coil Type | | internal groove tube |

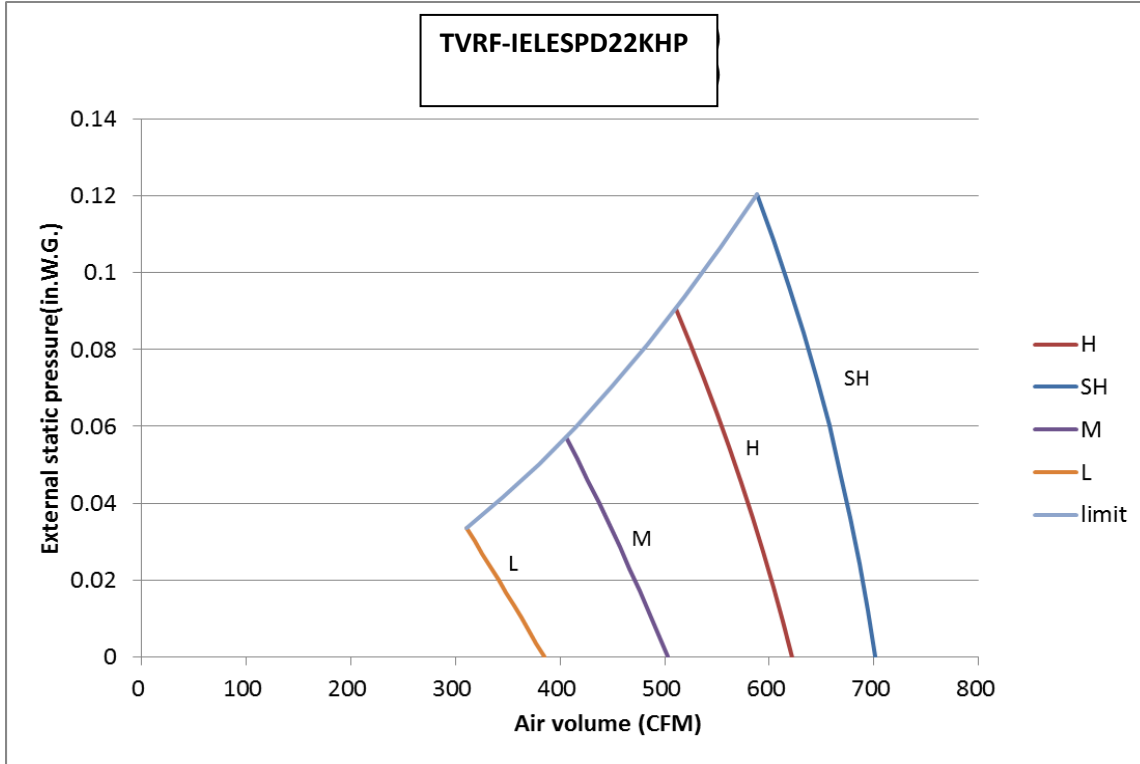

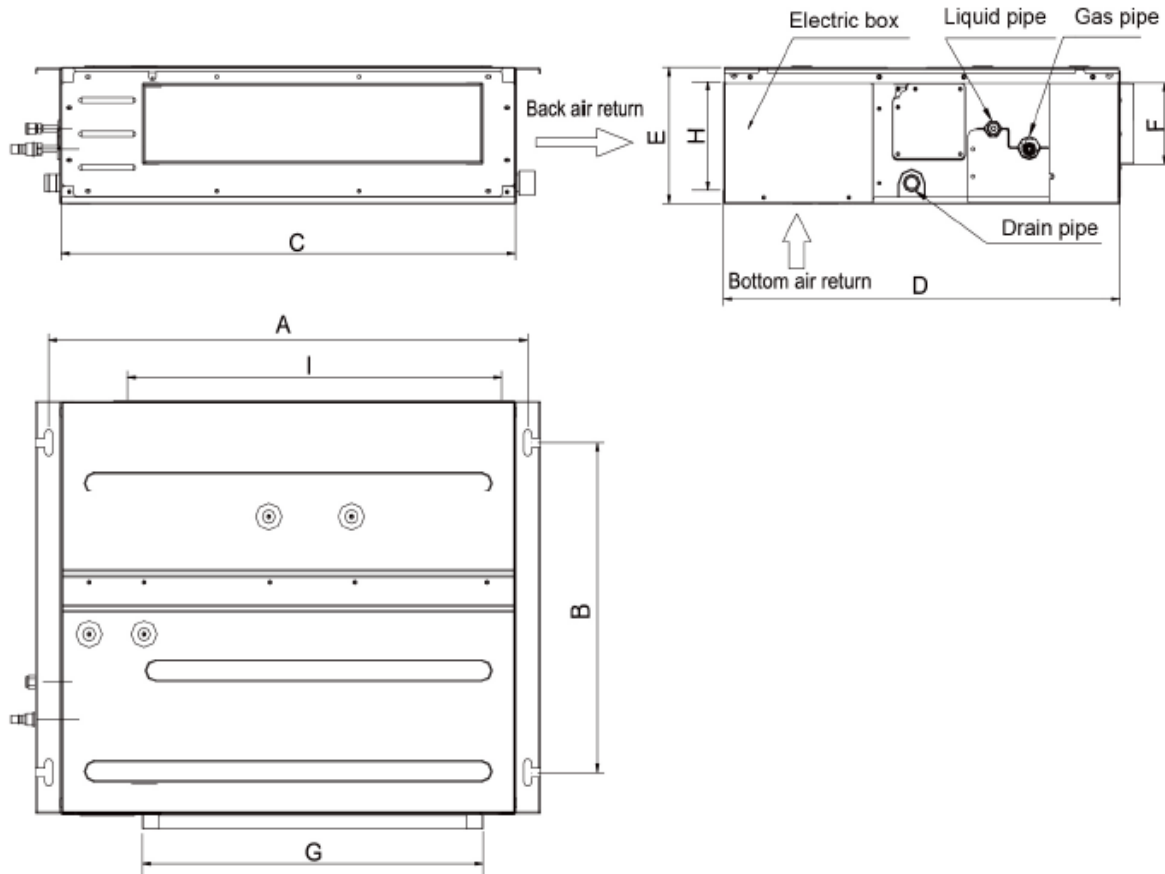Outline Dimension Diagram

| | | | | | |
|------|-------|--------|--------|--------|-------|
| | A | B | C | D | E |
| mm | 1142 | 491 | 1100 | 615 | 200 |
| inch | 45 | 19 3/8 | 43 1/4 | 24 1/4 | 7 7/8 |
| | F | G | H | I | |
| mm | 121 | 928 | 161 | 980 | |
| inch | 4 3/4 | 36 1/2 | 6 3/8 | 38 5/8 | |

TOSOT

5965 Chemin de la Côte de Liesse
Saint Laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com