

VRF Indoor	MODEL: TVRF-IEWM09KHP	<b>TOSOT</b>
------------	-----------------------	--------------

Job Name: \_\_\_\_\_  
 Engineer Name: \_\_\_\_\_  
 System No: \_\_\_\_\_

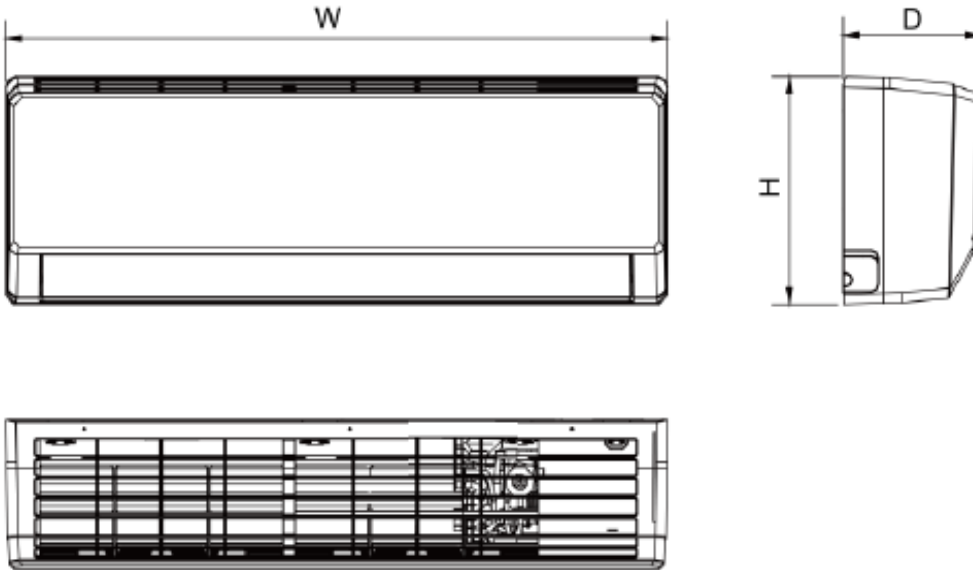
Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Date: \_\_\_\_\_

**Indoor VRF SYSTEM FEATURES**

- \* Comfortable And Balanced Airflow, Up&Down Air Outlet
- \* Cold Air Prevention Design.
- \* Triple Defenders For Better Purification.
- \* Multiple Protections



Specifications		Model Name
Unit Type		TVRF-IEWM09KHP
Cooling Capacity	Btu/h	9,500
Heating Capacity	Btu/h	11,000
External Dimensions (WxHxD)	In.	33-1/4 x 10-7/8 x 7-1/8
	mm	843 x 275 x 180
Net Weight	Lbs. / Kg	22/10
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	2.80
Power Heating Consumption	kW	3.20
Current Cooling	A	0.2
Current Heating	A	0.2
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	1/4 - 6.35
	Gas (Low Pressure)	3/8 - 9.52
Sound Pressure Level	dB(A)	38
<b><u>Fan</u></b>		
Type x Quantity		Cross-flow x 1
Airflow Rate	CFM	295
<b><u>Motor</u></b>		
Motor Type x Quantity		PG x 1
Motor Output	kW	0.02
Refrigerant		R410A
Coil Type		Direct Drive
Unit Color		white

**Outline Dimension Diagram**

		W	H	D
TVRF- IEWM09KHP	mm	843	275	180
	inch	33 1/4	10 7/8	7 1/8

**TOSOT**

5965 Chemin de la Côte de Liesse  
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

[info@tosotusa.com](mailto:info@tosotusa.com)

[www.tosotusa.com](http://www.tosotusa.com)