

VRF Indoor	MODEL: TVRF-IEWM24KHP	TOSOT
------------	-----------------------	--------------

Job Name: _____
 Engineer Name: _____
 System No: _____

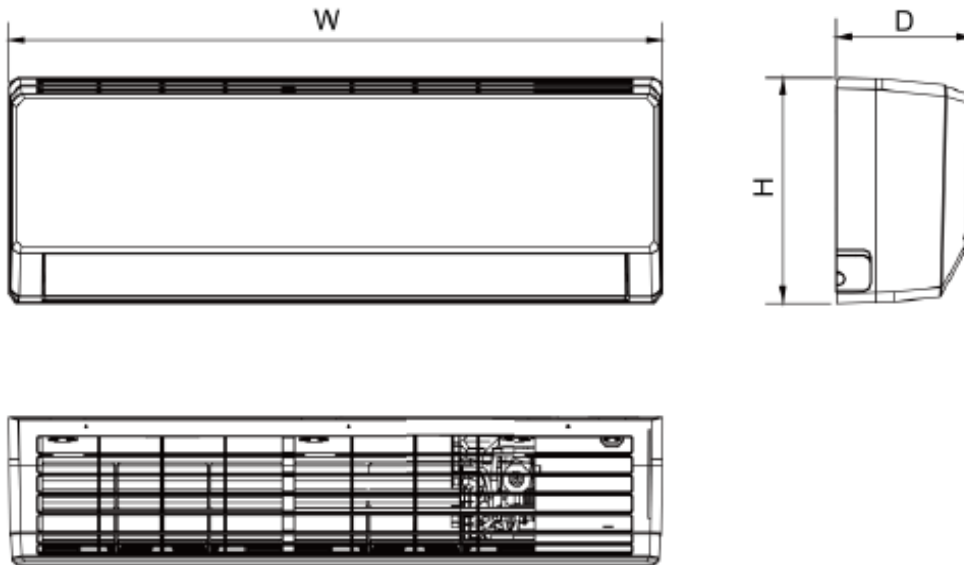
Location: _____
 Contractor: _____
 Date: _____

Indoor VRF SYSTEM FEATURES

- * Comfortable And Balanced Airflow, Up&Down Air Outlet
- * Cold Air Prevention Design.
- * Triple Defenders For Better Purification.
- * Multiple Protections



Specifications		Model Name
Unit Type		TVRF-IEWM24KHP
Cooling Capacity	Btu/h	24,000
Heating Capacity	Btu/h	25,500
External Dimensions (WxHxD)	In.	39-5/8 x 8-3/4 x 12-1/2
	mm	1008 x 319 x 221
Net Weight	Lbs. / Kg	33/15
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	7
Power Heating Consumption	kW	7.5
Current Cooling	A	0.31
Current Heating	A	0.31
Minimum Circuit Ampacity (MCA)	A	1
Maximum Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.87
Sound Pressure Level	dB(A)	44
<u>Fan</u>		
Type x Quantity		Cross-flow x 1
Airflow Rate	CFM	440
<u>Motor</u>		
Motor Type x Quantity		PG x 1
Motor Output	kW	0.035
Refrigerant		R410A
Coil Type		Direct Drive
Unit Color		white

Outline Dimension Diagram

		W	H	D
TVRF-IEWM24KHP	mm	1008	221	319
	inch	39 5/8	8 3/4	12 1/2

TOSOT

5965 Chemin de la Côte de Liesse
Saint Laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com