

VRF Heat Pump	MODEL: TVRF-OC72KHP/220V	TOSOT
---------------	--------------------------	--------------

Job Name: _____
 Engineer Name: _____
 System No: _____

Location: _____
 Contractor: _____
 Date: _____

OUTDOOR VRF SYSTEM FEATURES

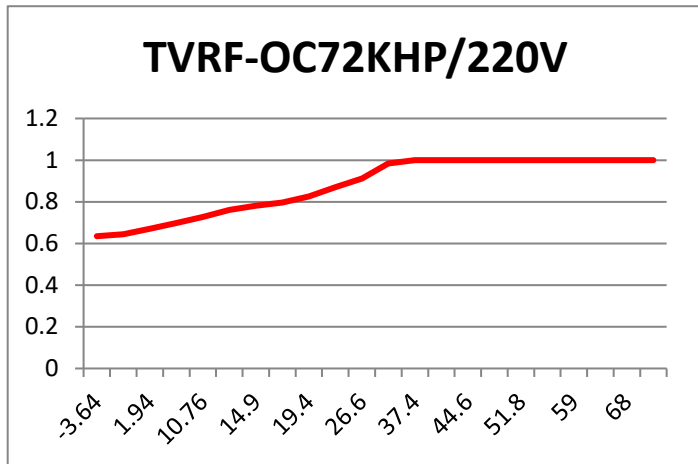
- * Emergency Function
- * Emergency Operation Of Compressor
- * Emergency Operation Of Fan
- * Highly Anticorrosive Golden Fins
- * Low Noise Of Outdoor Unit
- * New Oil Return Control
- * Compact Design
- * Five-Way Piping Connection
- * Five Efficient Operation Modes



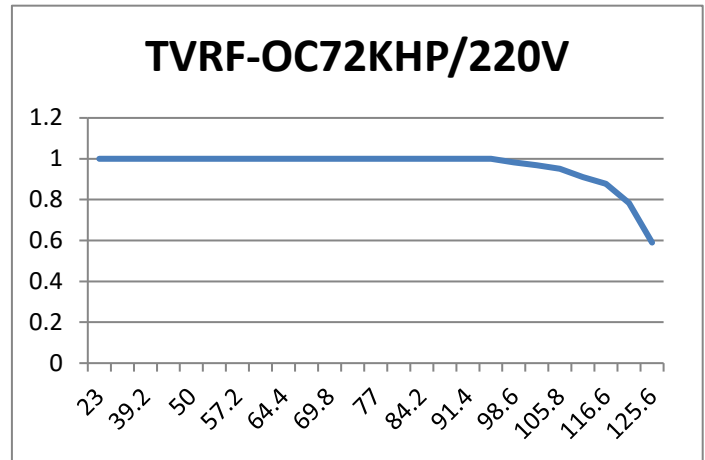
Specifications		Model Name
Unit Type		TVRF-OC72KHP/220V
Nominal Cooling Capacity	Btu/h	69,000
Nominal Heating Capacity	Btu/h	77,000
External Dimensions WxHxD	In.	36-5/8 x 63-1/5 x 30-1/8
	mm	930 x 1605 x 765
Net Weight	Lbs. / Kg	496/225
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 3-phase, 60HZ
Cooling Power Input	KW	5.45
Heating Power Input	KW	5.8
Minimum Circuit Ampacity (MCA)	A	30
Maximum Circuit Breaker Size	A	45
Piping Diameter (Brazed) (In./mm)	Low pressure Gas Pipe	3/4 19.05
	High pressure Liquid Pipe	3/8 9.52
Indoor Unit	Total Capacity	50 to 135% of Outdoor Unit Capacity
	Model/Quantity	
Maximum Number of Connected IDUs	units	13
Min. Capacity Range of Connected IDU	kBtu/h	36
Max. Capacity Range of Connected IDU	kBtu/h	97.2
Sound Pressure Level	db(A)	60

VRF Heat Pump	MODEL: TVRF-OC72KHP/220V	TOSOT
Fan		
Type x Quantity		Propellerx2
Airflow Rate	CFM	6079
Direct-drive inverter Motor Output	W	750
Compressor		
Compressor Operation Range		12%~100%
Compressor Type x Quantity		Inverter scroll typex1
Compressor Motor Output	kW	7.15
Compressor Crankcase Heater		Yes
Refrigerant		R410A
Lubricant		FVC68D
High-pressure Protection Device		High pressure sensor, High pressure switch
Compressor / Fan Protection Device		Over-current protection, Over-heat protection
Inverter Protection Device		Over-current protection, Over-heat protection, High/Low voltage protection
EER (Ducted/Non-Ducted)		13.7
High COP 47F (Ducted/Non-Ducted)		4.22
Low COP 17F (Ducted/Non-Ducted)		2.51
IEER		21.5/28.1

Heating Performance F / %



Cooling Performance F / %

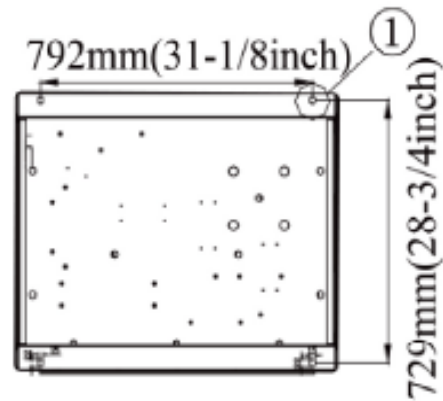


Optional Controlling System

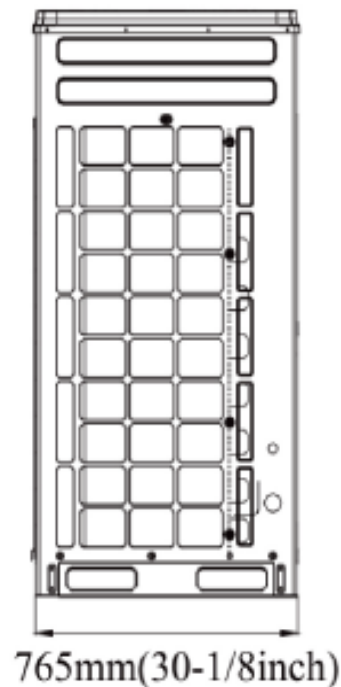
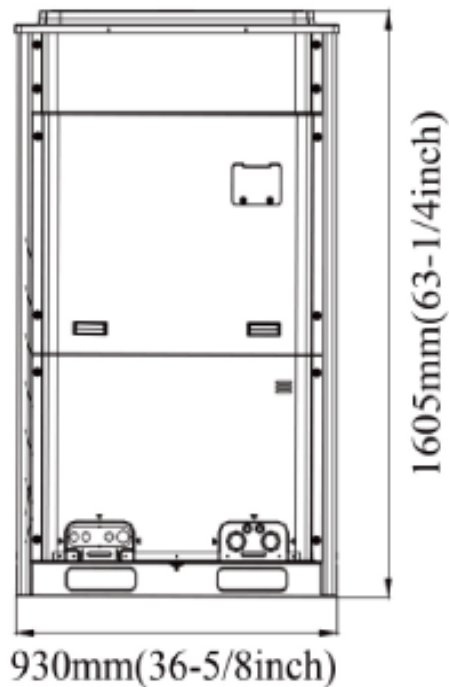
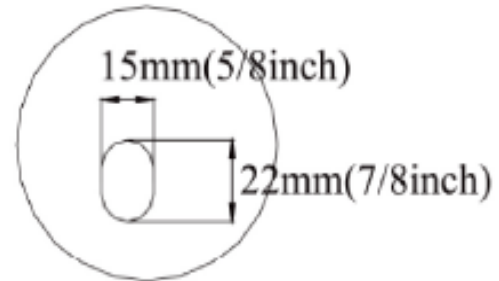
- * Wired Controller
- * Centralized Controller
- * Smart Zone Controller
- * Long-Distance Monitoring Software
- * Kit for Commissioning Software

BMS Accessories

- * Communication Module (Modbus)
- * BACnet Gateway
- * Photoelectricity Insulation Converter

Outline Dimension Diagram

① Installation hole

**TOSOT**

5965 Chemin de la Côte de Liesse
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com