

Single zone inverter mini split

MODEL: TW12HQ2A1A

TOSOT

Job Name:

Engineer Name:

System No:

- File Resubmit
 Approval Other

Location:

Contractor:

Date:

General Features

- Smart 1 Hertz Inverter Technology
- Low Ambient Cooling to 5 °F
- Multiple Fan Speeds
- Memory Function
- Fan Delay Function
- Intelligent Pre-heating / Defrost
- LED display
- Control lock
- Wi-Fi (Optional)
- Auto Clean
- Gold Fin Condenser
- Low Voltage Start-up
- High And Low Pressure Protection Features
- Load Protection Features
- Over-Current Protection
- Anti Freeze Protection



Unit Performance:

<i>Cooling:</i>	
Capacity (Min-Rated-Max, Btu/h)	3,514-12,000-14,569
SEER	22
EER	12.5
<i>Heating:</i>	
Capacity (Min-Rated-Max, Btu/h)	2,764-12,200-16,582
HSPF	10.2
COP (W/W)	3.61

Unit Specification

Refrigerant Type	R410A
Refrigerant Charge (oz)	47.6
ODU Sound Pressure (dB(A))	53
IDU Sound Pressure (dB(A))	28/45
ODU Net Weight (lbs)	77.1
IDU Net Weight (lbs)	23.2
Dehumidifying (Pint/h)	2.96

Fan

ODU / IDU Type	Axial-flow/Cross-flow
Quantity (ODU + IDU)	1+1
Motor/Drive	Direct Drive
ODU Max Air Flow Rate (CFM)	1999.9
IDU Air Flow Rate (CFM)	171/400

Compressor

Cooling Operation Ambient temp. Range	0~115 °F
Heating Operation Ambient temp. Range	-5~75 °F
Compressor Type	Rotary
Fan Motor Output (W)	30
Crankcase Heater	Yes

Electrical Specification

Power Supply	103/127 V / 60Hz
Communications Wire Size	AWG 12
MOP (A)	25
MCA (A)	15
Cooling Rated Amps (A)	11.54
Heating Rated Amps (A)	11.98
Compressor RLA (A)	5
Indoor Fan Motor RLA (A)	0.32
Outdoor Fan Motor RLA (A)	0.55
Nominal Cooling Power Input (kW)	0.96
Nominal Heating Power Input (kW)	0.99

Piping


Liquid Line (in, OD)	1/4
Gas Line (in, OD)	1/2
Additional Refrigerant (oz./ft.)	0.215
Max Pipe Length (ft.)	65.6
Piping Length (no add'l refrigerant, ft.)	24.6
Max Elevation (ft.)	32.8

AHRI certification Ref #




Capacity Variation Ratio According to Temperature

Cooling

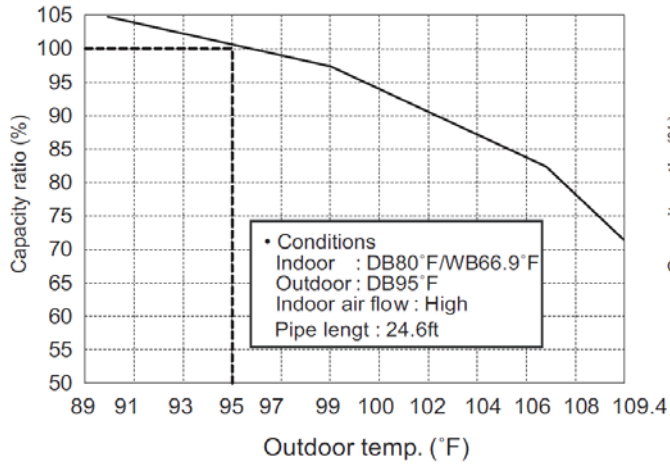

Heating

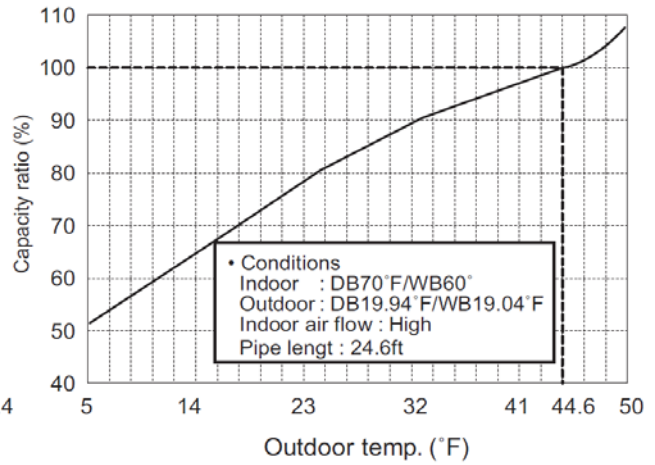


Single zone inverter mini split

MODEL: TW12HQ2A1A

TOSOT

Outline Dimension Diagram

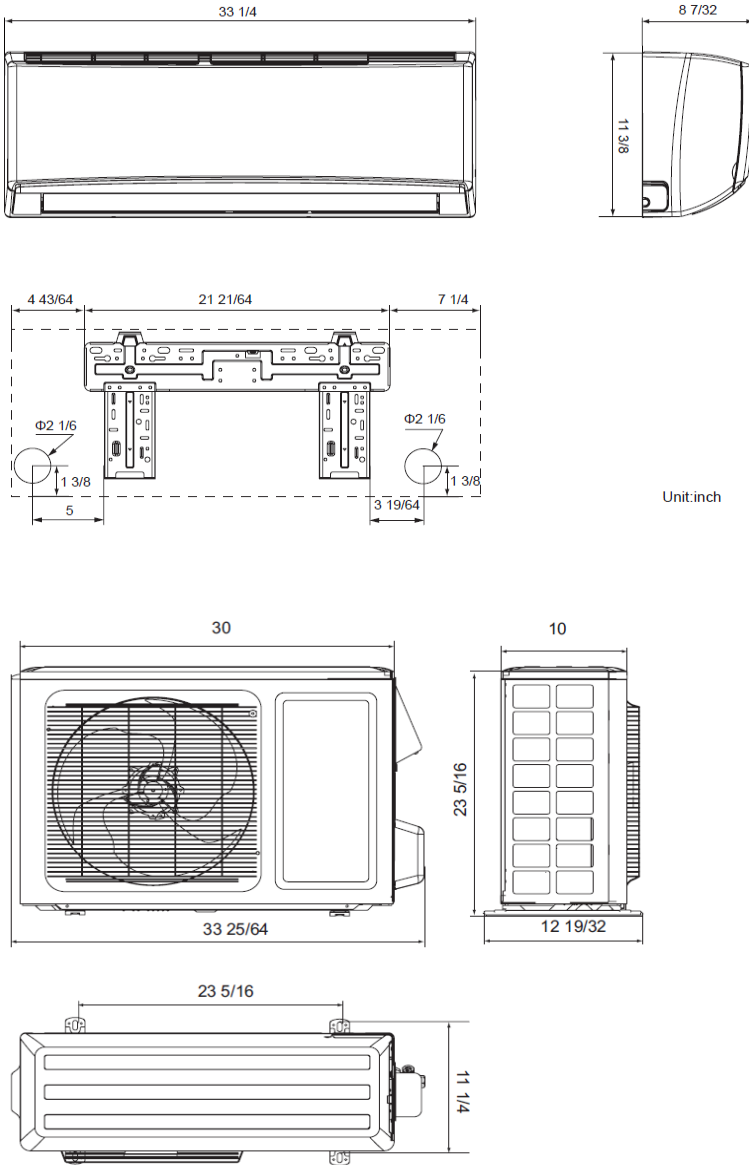

GLOSSARY

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

HSPF - Heating Seasonal Performance Factor

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity

TOSOT

5965 Chemin de la Côte de Liesse
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com